

**KUEBLER - ABSOLUTE CODED  
 ANGULAR TRANSMITTER SENDIX F3663  
 / F3683, OPTICAL, SSI, Ø36 MM  
 SERIE F3663**

- Housing diameter Ø36 mm
- SSI / BiSS - interface
- Safety-Lock™
- Up to 17 + 24 bit resolution



**PRODUCT DESCRIPTION**

Sendix F3663 / F3683 is a series of multivalved optical axial outputs with SSI interface and a resolution of up to 17 + 24 bits despite its compact size of 36x42 mm. The sensor also has high enclosure class, shock resistance and a wide temperature range. The sensor is therefore very suitable for applications where extreme environments or temperatures can occur, such as mobile applications. The sensor is supplied with a tangential cable, which means that there is no exposed cable input on the sensor, but it is embedded in the housing itself to increase impact on impact and impact. The Sendix F3663 / F3683 is also available in a salt water resistant version.

Please refer to the images below for ordering information.

Order code	8.F3663 . XXXX . XXX2									
Shaft version	Type	a	b	c	d	e	f	g		
<b>a</b> Flange		<b>c</b> Interface / power supply				<b>e</b> Code		Optional on request		
1 = clamping flange, IP67, ø 36 mm [1.42"]		1 = SSI, BiSS / 5 V DC				B = SSI, binary		- surface protection		
3 = clamping flange, IP65, ø 36 mm [1.42"]		<b>2 = SSI, BiSS / 10 ... 30 V DC</b>				C = BiSS, binary		- salt spray tested		
2 = synchro flange, IP67, ø 36 mm [1.42"]		3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC				<b>G = SSI, gray</b>		- other singleturn resolutions		
<b>4 = synchro flange, IP65, ø 36 mm [1.42"]</b>		4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC				<b>f</b> Resolution (singleturn)				
		5 = SSI, BiSS / 5 V DC, with sensor output				B = 9 bit ST				
		6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output				A = 10 bit ST				
<b>b</b> Shaft (ø x L), with flat		7 = SSI, BiSS + 2048 ppr. RS422 / 5 V DC				2 = 12 bit ST				
1 = ø 6 x 12.5 mm [0.24 x 0.49"]		8 = SSI, BiSS + 2048 ppr. RS422 / 10 ... 30 V DC				<b>3 = 13 bit ST</b>				
<b>3 = ø 8 x 15 mm [0.32 x 0.59"]</b>						4 = 14 bit ST				
5 = ø 10 x 20 mm [0.39 x 0.79"]						7 = 17 bit ST				
2 = ø 1/4" x 12.5 mm [0.49"]						<b>g</b> Resolution (multiturn)				
4 = ø 3/8" x 5/8"						<b>2 = 12 bit MT</b>				
		<b>d</b> Type of connection				6 = 16 bit MT				
		<b>1 = tangential cable, 1 m [3.28'] PUR</b>				4 = 24 bit MT				
		3 = tangential cable, 5 m [16.40'] PUR								
		U = tangential cable, 10 m [32.81'] PUR								
		5 = tangential cable, 1 m [3.28'] PUR with M12 connector for central fastening, 8-pin <sup>1)</sup>								

**Order code**  
**Hollow shaft**

**8.F3683**  
Type

**.XXXX.XXX2**  
a b c d e f g

**a Flange**

- 1 = with spring element, short, IP65
- 3 = with spring element, long, IP65
- 2 = with stator coupling, IP65,  $\varnothing$  46 mm [1.81"]**

**b Through hollow shaft**

- 1 =  $\varnothing$  6 mm [0.24"]
- 3 =  $\varnothing$  8 mm [0.32"]
- 2 =  $\varnothing$  1/4"
- Blind hollow shaft  
(insertion depth max. 14.5 mm [0.57"])
- 4 =  $\varnothing$  10 mm [0.39"]**

**c Interface / power supply**

- 1 = SSI, BiSS / 5 V DC
- 2 = SSI, BiSS / 10 ... 30 V DC**
- 3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC
- 4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC
- 5 = SSI, BiSS / 5 V DC, with sensor output
- 6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output
- 7 = SSI, BiSS + 2048 ppr. RS422 / 5 V DC
- 8 = SSI, BiSS + 2048 ppr. RS422 / 10 ... 30 V DC

**d Type of connection**

- 1 = tangential cable, 1 m [3.28'] PUR**
- 3 = tangential cable, 5 m [16.40'] PUR
- U = tangential cable, 10 m [32.81'] PUR
- 5 = tangential cable, 1 m [3.28'] PUR  
with M12 connector for central fastening, 8-pin <sup>1)</sup>

**e Code**

- B = SSI, binary
- C = BiSS, binary
- G = SSI, gray**

**Optional on request**

- surface protection
- salt spray tested
- other singleturn resolutions

**f Resolution (singleturn)**



- B = 9 bit ST
- A = 10 bit ST
- 2 = 12 bit ST
- 3 = 13 bit ST**
- 4 = 14 bit ST
- 7 = 17 bit ST

**g Resolution (multiturn)**

- 2 = 12 bit MT**
- 6 = 16 bit MT
- 4 = 24 bit MT

## TECHNICAL DATA



Connection	Cable
Housing diameter	36 mm
IP class	IP65, IP67
Mounting	Shoulder
Output	SSI
Sensor type	Absolute
Shaft diameter max	10 mm
Shaft diameter min	6 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	5 V DC
Temperature operational max	90 °C
Temperature operational min	-40 °C
Version	Multiturn

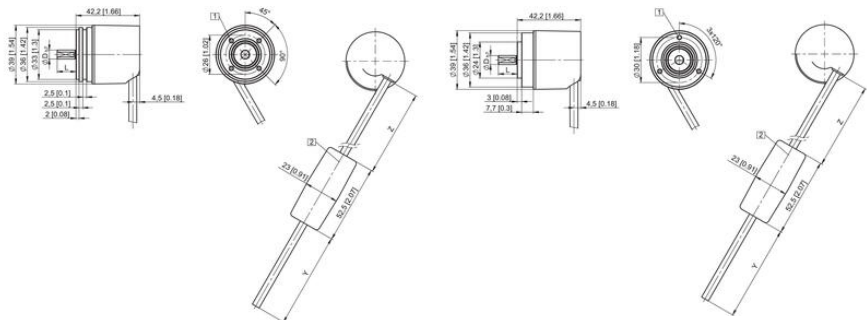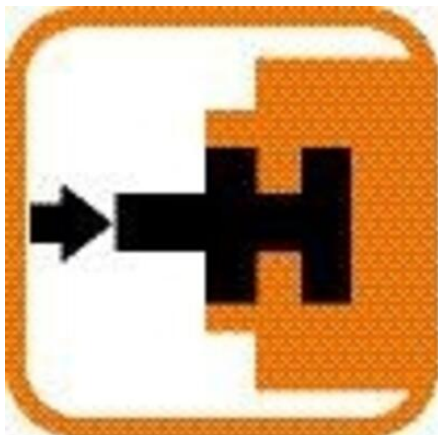

Interface	Type of connector	Features	Cable
1,2	I,3	SSI or BSSL, SET, DIR, Status	Signal: GND +V +C -C +D -D SET DIR Stat PE Cable colour: WH BN GN YE GF PK BU RD BK VT (CPN RD-BU) Shield
Interface	Type of connector	Features	M12 connector
1,2	8	SSI or BSSL, SET, DIR	Signal: GND +V +C -C +D -D SET DIR Shield/PE M12 connector: 1 2 3 4 5 6 7 8 PE
Interface	Type of connector	Features	Cable
3,4	1,3	SSI or BSSL, SET, DIR, 2048 SinCos	Signal: GND +V +C -C +D -D SET DIR A A inc B B inc PE Cable colour: WH BN GN YE GF PK BU RD BK VT (CPN RD-BU) Shield
Interface	Type of connector	Features	Cable
5	1,3	SSI or BSSL, SET, DIR, Sensor outputs	Signal: GND +V +C -C +D -D SET DIR GND <sub>sen</sub> +V <sub>sen</sub> PE Cable colour: WH BN GN YE GF PK BU RD VT RD-BU Shield
Interface	Type of connector	Features	Cable
6	1,3	SSI or BSSL, 2048 SinCos, Sensor outputs	Signal: GND +V +C -C +D -D GND <sub>sen</sub> +V <sub>sen</sub> A A inc B B inc PE Cable colour: WH BN GN YE GF PK BU RD BK VT (CPN RD-BU) Shield
Interface	Type of connector	Features	Cable
7,8	1,3	SSI or BSSL, 2048 Inc. RS422	Signal: GND +V +C -C +D -D A A inc B B inc PE Cable colour: WH BN GN YE GF PK BK VT (CPN RD-BU) Shield

+V Encoder power supply +V DC  
GND Encoder power supply ground GND (0V)  
+C Clock signal  
-C Data signal  
+D SET Set input. The current position becomes defined as position zero.  
-D DIR Direction input. If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.  
Stat Status output  
PE Protective earth  
PK Plug connector housing (Shield)  
A, A inc Incremental output channel A  
B, B inc Incremental output channel B

Top view of mating side, male contact base:

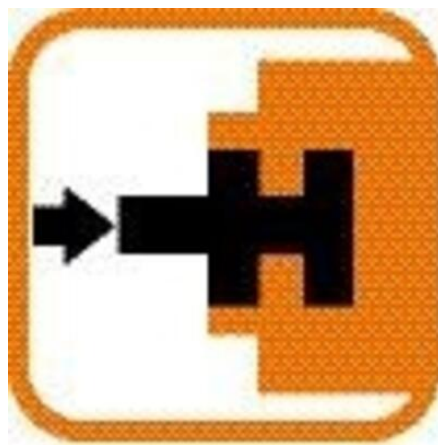

Interface	Type of connector	Features	Cable
1,2	I,3	SSI or BSSL, SET, DIR, Status	Signal: GND +V +C -C +D -D SET DIR Stat PE Cable colour: WH BN GN YE GF PK BU RD BK VT (CPN RD-BU) Shield
Interface	Type of connector	Features	M12 connector
1,2	8	SSI or BSSL, SET, DIR	Signal: GND +V +C -C +D -D SET DIR Shield/PE M12 connector: 1 2 3 4 5 6 7 8 PE
Interface	Type of connector	Features	Cable
3,4	1,3	SSI or BSSL, SET, DIR, 2048 SinCos	Signal: GND +V +C -C +D -D SET DIR A A inc B B inc PE Cable colour: WH BN GN YE GF PK BU RD BK VT (CPN RD-BU) Shield
Interface	Type of connector	Features	Cable
5	1,3	SSI or BSSL, SET, DIR, Sensor outputs	Signal: GND +V +C -C +D -D SET DIR GND <sub>sen</sub> +V <sub>sen</sub> PE Cable colour: WH BN GN YE GF PK BU RD VT RD-BU Shield
Interface	Type of connector	Features	Cable
6	1,3	SSI or BSSL, 2048 SinCos, Sensor outputs	Signal: GND +V +C -C +D -D GND <sub>sen</sub> +V <sub>sen</sub> A A inc B B inc PE Cable colour: WH BN GN YE GF PK BU RD BK VT (CPN RD-BU) Shield
Interface	Type of connector	Features	Cable
7,8	1,3	SSI or BSSL, 2048 Inc. RS422	Signal: GND +V +C -C +D -D A A inc B B inc PE Cable colour: WH BN GN YE GF PK BK VT (CPN RD-BU) Shield

+V Encoder power supply +V DC  
GND Encoder power supply ground GND (0V)  
+C Clock signal  
-C Data signal  
+D SET Set input. The current position becomes defined as position zero.  
-D DIR Direction input. If this input is active, output values are counted backwards (decrease) when the shaft is turning clockwise.  
Stat Status output  
PE Protective earth  
PK Plug connector housing (Shield)  
A, A inc Incremental output channel A  
B, B inc Incremental output channel B

Top view of mating side, male contact base:

