

KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX M3663 / M3683, MAGNETIC, SSI, Ø36 MM

SERIE M3663

- Housing diameter Ø36 mm
- SSI - interface
- New multicolor technology
- IP67



PRODUCT DESCRIPTION

Sendix M3663 / M3683 is a magnetically encoded absolute encoder with the latest in multicolor technology with "Energy Harvesting". Energy Harvesting technology is based on magnetic recharging, eliminating both battery and gear.

With its magnetic coding, the pulse sensor becomes more shockproof and insensitive. The high IP rating allows the Sendix M3663 / M3683 for outdoor environments and mobile applications.

Please refer to the images below for ordering information.

Order code	8.M3663.XX2X.XXX2												
Shaft version	Type	a	b	c	d	e	f	g					
a Flange		1 = clamping flange, IP67, ø 36 mm [1.42"]	3 = clamping flange, IP65, ø 36 mm [1.42"]	2 = synchro flange, IP67, ø 36 mm [1.42"]	4 = synchro flange, IP65, ø 36 mm [1.42"]	d Type of connection	1 = axial cable, 1 m [3.28'] PUR	A = axial cable, special length PUR *)	2 = radial cable, 1 m [3.28'] PUR	B = radial cable, special length PUR *)	3 = axial M12 connector, 8-pin	4 = radial M12 connector, 8-pin	f Resolution (singleturn)
b Shaft (ø x L), with flat		1 = ø 6 x 12.5 mm [0.24 x 0.49"]	3 = ø 8 x 15 mm [0.32 x 0.59"]	5 = ø 10 x 20 mm [0.39 x 0.79"]	2 = ø 1/4" x 12.5 mm [0.49"]	*) Available special lengths (connection types A, B):	2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']	order code expansion .XXXX = length in dm	ex.: 8.M3663.432A.G322.0030 (for cable length 3 m)				2 = 12 bit ST
c Interface / power supply		2 = SSI / 10 ... 30 V DC				e Code	B = SSI, binary	G = SSI, gray					3 = 13 bit ST
													4 = 14 bit ST
													g Resolution (multiturn)
													2 = 12 bit MT
													6 = 16 bit MT
													A = 20 bit MT
													4 = 24 bit MT
													<i>Optional on request</i>
													- Ex 2/22 (only for connection types 3 and 4)
													- surface protection salt spray tested

Order code
Hollow shaft

8.M3683.XX2X.XXX2
Type

a Flange
2 = with stator coupling, IP65, ø 46 mm [1.81"]
 3 = with spring element, long, IP65
 5 = with stator coupling, IP67, ø 46 mm [1.81"]
 6 = with spring element, long, IP67

b Blind hollow shaft
 (insertion depth max. 18.5 mm [0.73"])
 1 = ø 6 mm [0.24"]
 3 = ø 8 mm [0.32"]
4 = ø 10 mm [0.39"]
 2 = ø 1/4"

c Interface / power supply
2 = SSI / 10 ... 30 V DC

d Type of connection
 1 = axial cable, 1 m [3.28'] PUR
 A = axial cable, special length PUR *)
 2 = radial cable, 1 m [3.28'] PUR
 B = radial cable, special length PUR *)
 3 = axial M12 connector, 8-pin
4 = radial M12 connector, 8-pin
 *) Available special lengths (connection types A, B):
 2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']
 order code expansion .XXXX = length in dm
 ex.: 8.M3683.242A.G322.0030 (for cable length 3 m)

e Code
 B = SSI, binary
G = SSI, gray

f Resolution (singleturn)
 A = 10 bit ST
 2 = 12 bit ST
3 = 13 bit ST
 4 = 14 bit ST


g Resolution (multiturn)
2 = 12 bit MT
 6 = 16 bit MT
 A = 20 bit MT
 4 = 24 bit MT

Optional on request

- Ex 2/22 (only for connection types 3 and 4)
- surface protection salt spray tested

TECHNICAL DATA

Connection	Cable, M12
Housing diameter	36 mm
IP class	IP65, IP67
Mounting	Shoulder
Output	SSI
Resolution MT	Max. 24 bit
Resolution ST	10-14 bit
Sensor type	Absolute
Shaft diameter max	10 mm
Shaft diameter min	6 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	10 V DC
Temperature operational max	85 °C
Temperature operational min	-40 °C
Version	Multiturn

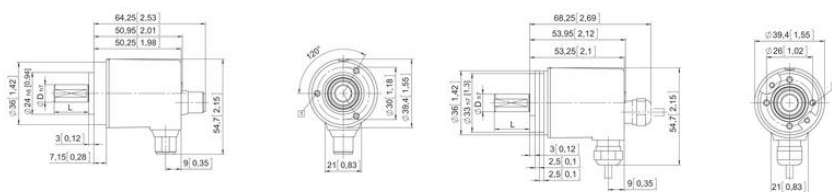

Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start up)
2	1, 2, A, B	SET, DIR	Signal: VV, W, C+, C-, D+, D-, S1, DIR, H Cable colour: BW, BR, GR, YE, KY, PK, BU, RD, WH
2	3, 4	SET, DIR	M12 connector, 8-pin Signal: 0V, +V, C+, C-, D+, D-, SET, DIR, H Pin: 1, 2, 3, 4, 5, 6, 7, 8, PH

+V Encoder power supply +V DC
 0V Encoder power supply ground (GND ID 1)
 C+, C- Clock signal
 D+, D- Data signal
 S1 Set input. The current position becomes defined as position zero.
 DIR Direction input. If this input is active, output values are counted backwards (decreases when the shaft is turning clockwise).
 PH/H Plug connector housing (shield)

