

KUEBLER - ABSOLUTE ENCODED ANGULAR TRANSMITTER SENDIX F5858 / F5878, OPTICAL, ETHERNET / IP, Ø58 MM

SERIE F5858

- Housing diameter Ø58 mm
- EtherNet/IP
- Safety-Lock[™]
- Quick startup






PRODUCT DESCRIPTION

Sendix F5858 / F5878 is a one-way fieldbus transducer with EtherNet / IP in robust design. Thanks to the construction of Safety-Lock ™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Sendix F5858 / F5878 comes with LED indication which facilitates diagnosis of the sensor.


Please refer to the image below for ordering information.

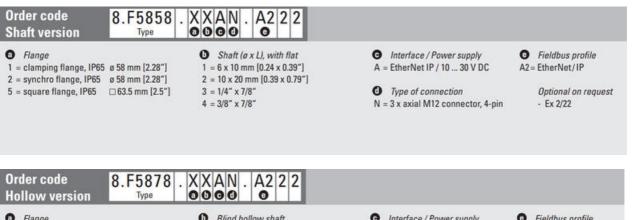

 Flange Blind hollow shaft Interface / Power supply Fieldbus profile (insertion depth max. 30 mm [1.18"]) A = EtherNet IP / 10 ... 30 V DC A2 = EtherNet/IP 1 = with spring element long, IP65 3 = with stator coupling, IP65 ø 65 mm [2.56"] A = 0 10 mm [0.39"]5 = with stator coupling, IP65 ø 63 mm [2.48"] Optional on request B = 0.12 mm [0.47"]O Type of connection C = ø 14 mm [0.55"] N = 3 x axial M12 connector, 4-pin - Ex 2/22 D = ø 15 mm [0.59"] E = 0.3/8"F = ø 1/2"

TECHNICAL DATA

Connection	M12
Housing diameter	58 mm
IP class	IP65
Mounting	Shoulder
Output	EtherNet/IP
Sensor type	Absolute
Shaft diameter max	10 mm
Shaft diameter min	6 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	10 V DC
Temperature operational max	80 °C
Temperature operational min	-40 °C
Version	Singleturn

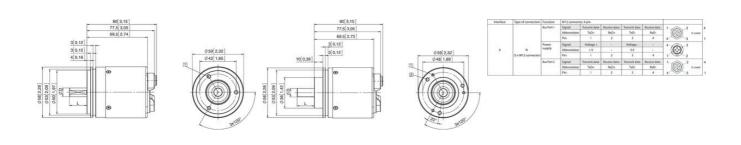

Rear side connections and display elements

8

1 LED: Link 1 2 LED: Mod. 3 LED: Net. 4 LED: Encoder 4 LED: Encode 5 LED: Link 2 6 Power 7 Port 1 8 Port 2 9 Switch: x1 10 Switch: x100 11 Switch: x10 с



nterface	Type of connection	Function	M12 connecti	or, 4-pin					
A. O XA		Bus Port 1	Signal	Transmit data	Receive data+	Transmit data	Receive data-	1. 00 2 mm	
			Abbreviation	TxD+	RxD+	TeD-	RxD-		
			Piec	1	2	3	4		
	2000	Power supply	Signat	Voltage =		Voltage -		; © ;	
	N (3 x M12 connector)		Abbreviation	+¥		0.9			
			Per	1	2	3	4		
			Signat	Transmit data+	Receive data+	Transmit data	Receive data-	1- @ 2 Bushe	
			Abbreviation	TxD+	RxD+	TxD	RxD-		
			Pin	1	2	3	4	1 2 3	

Rear side connections and display elements

1 LED: Link 1 2 LED: Mod. 3 LED: Net. 4 LED: Encoder B
 4
 LED: Encoder

 5
 LED: Link 2

 6
 Power

 7
 Port 1

 8
 Port 2

 9
 Switch: x1

 10
 Switch: x100

 11
 Switch: x10
¢

