

24 V DC UPS FOR EXTERNAL BATTERY 3.9-40 AH

UB10.241

DC UPS 24V dc I/P 24V dc 10A O/P 3.9-40Ah

- Load current 10 A
- Only one 12 V battery
- Optimized battery charging
- Optional backup times
- Relay outputs for status



PRODUCT DESCRIPTION

UB10.241 is suitable for use in applications in which interruptions occur relatively often and the times are fairly short, such as for assuring process conclusion and retaining operation of PLC and other critical components.

A complete DC-UPS system consists of a control unit and battery, and power supply with suitable power for the application. In the event of a power outage, the battery is automatically switched in and supplies the connected loads. The control unit requires just (1) 12 V battery that then transforms the battery voltage up to 22.3 V dc. Two batteries do not need to be matched with one another and the output voltage does not follow the battery's discharge curve but is instead constant at 22.3 V. The battery capacity is utilized 100 % compared with two batteries connected in series, where one of the batteries is not fully charged.


Two relay outputs indicate status; the module is ready (battery capacity >85 %) and the module is active. (buffer mode) The control unit tests the battery's condition in cycles. When it is time to replace the battery, a relay output is activated (replace battery). At the front, optimized final charging voltage in relation to ambient temperature is selected. There are three available alternatives: 10 °C, 25 °C and 40 °C.

The back-up time can be set in different time ranges to save battery capacity. When choosing constant discharge, the output voltage will be active until the battery reaches deep discharge and the control unit then disconnects the battery. There is also an input, Inhibit, for external shut-off of the back-up time. In the event of a battery fuse fault, the "ready" output is deactivated and a red LED lights on the control unit. The output is current limited and turns itself off after about 5 seconds after a short circuit to spare the battery and at the same time, avoids tripping the battery fuse. In the event of a short circuit in the battery mode, the module supplies about 20 A, which helps trip any secondary fuses.


Monitoring of the battery fuse and current limitation in the event of short circuits provides increased reliability and guarantees that the UPS will function after a short circuit. There is no galvanic isolation between the 24 V dc input and output or between 24 V and 12 V. Isolation between the mains and the output is executed via the power supply.

BACKUP TIMES

Back-up time with 7 Ah battery (curve A)



Back-up time with 26 Ah battery

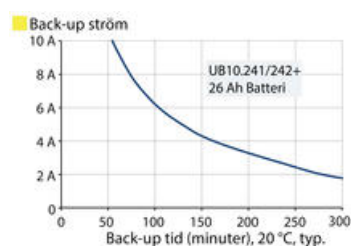

TECHNICAL DATA

INPUT DATA

Input voltage from the unit	24 V DC
Input voltage from the battery	12 V DC
Input voltage for battery connection	22,8 V DC
Input current during charging	1,2 A

OUTPUT DATA

Output current at 24 V dc	10 A
Output voltage for battery operation	22,25
Output voltage normal operation	24 V DC
Output voltage at buffering	22,25 V DC
Output current for battery operation max	10 A (15 A @ 5 s)
Output current during operation max	15 A

EFFICIENCY / LIFETIME / MTBF

Efficiency	97,8 %
Life span	137 400 h @ 10 A, 40 °C
MTBF (IEC 61709)	886 000 h @ 10 A, 40 °C

DIMENSIONS

Width	49 mm
Height	124 mm
Depth	117 mm
Weight	0,65 kg

OTHER

Approvals	ABS, CB, CE, CSA, CSA US, EX, GL, IECEx, UL
IP class	IP20
Charging the battery type	1,5 A
Material protection	Aluminium
Ripple max	20 mV pp
Voltage level for battery connection	22,3 V DC
Power drop from +60 °C to +70 °C	9,6 W/°C
Temperature min without derating	-25 °C

Temperature max without derating

60 °C

Permitted battery sizes

3,9-40 Ah

Type Power Supply

DC-UPS

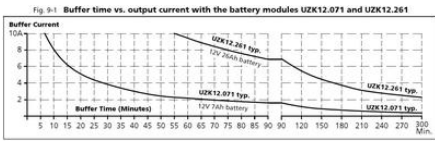


Fig. 24-2 Front view

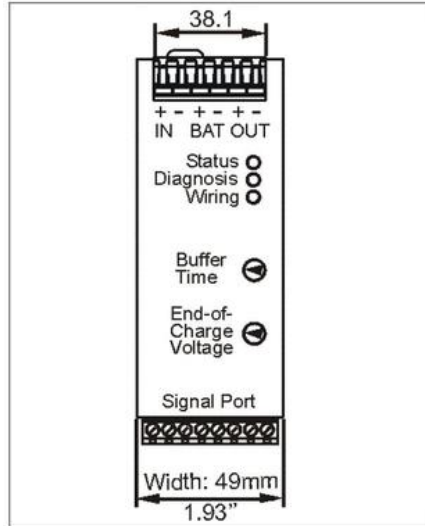


Fig. 24-1 Side view

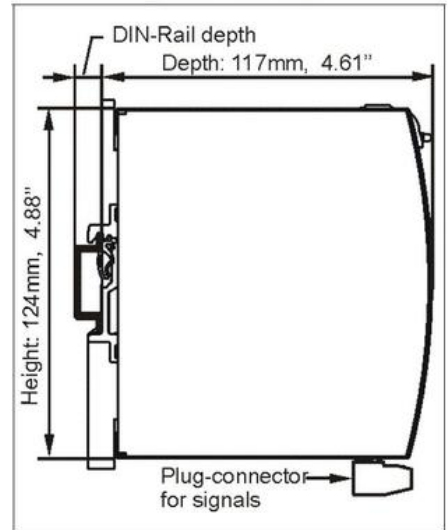


Fig. 25-1 Typical wiring diagram

