


## INSULATED SPADE TERMINALS

FSH

2548.0

FSH 1/2.8, 1.5mm<sup>2</sup>, 2.8 x 0.5mm insulated female spade crimp, Red

- Brass (CuZn), metallic insulation holder Cu-ETP, galv, Sn
- Wide easy entry collar PVC insulation
- Continuous-use temperature range -10°C...75°C
- Male, female and piggy back options

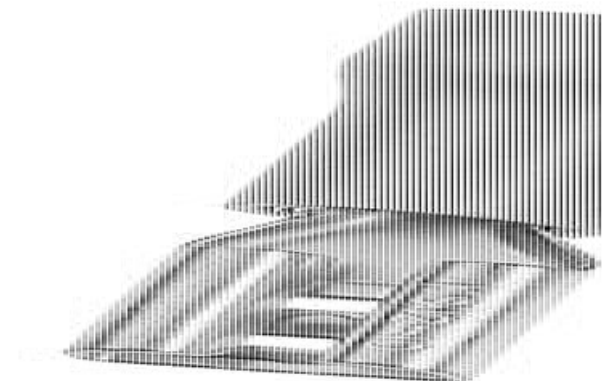

### PRODUCT DESCRIPTION

Conta-Clip offer a range of standard automotive type insulated spade crimp terminals to suit many applications.

These terminals are usually identified by the coloured collars for the various cable sizes.

The standard range covers from 0.5mm<sup>2</sup> to 6mm<sup>2</sup> cable sizes with 2.8mm to 6.3mm faston connections. These are also available as fully insulated or 'piggy back' variants.

All types within the range have a widened cable entry, making for an easy installation.

## TECHNICAL DATA

### GENERAL DATA

Colour	Red
Rated wire cross section to (AWG)	16
Rated wire cross section from (AWG)	20
Conductor shape	Flat plug acc. DIN 46245 Teil 1 – 3
Cross section max	1,5 mm <sup>2</sup>
Cross section min	0,5 mm <sup>2</sup>

### DIMENSIONS

Diameter of feed-in funnel	3,5 mm
Length	18,8 mm

## MATERIALS

Operating temperature from	-10 °C
Operating temperature to	75 °C
Soldered	No
Conductor material	Copper
Contact surface	Tinned

## ADDITIONAL DATA

Pack size	100
Country of origin	TW
Tariff code	85369010
Weight	0,09 g
Insulation material	Expanded PVC

