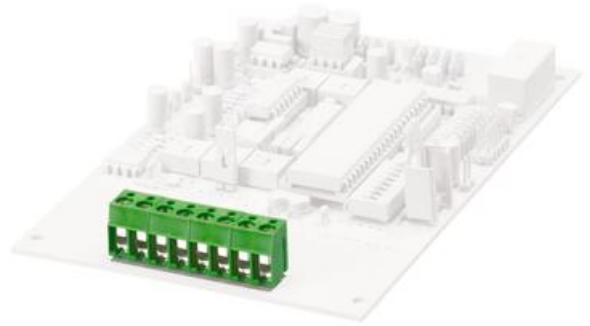


PK 120

10141.1

PK 120/11/5,08-H GN

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Type	PCB terminal
Pitch	5,08 mm
Colour	Green
Number of poles	11
Approvals	UL, cUL, VDE

RATINGS

Rated current	24 A
Rated voltage	250 V
Rated cross section	2,5 mm ²
Rated impulse voltage	2 kV
Overvoltage category	III
Contamination degree	3

DIMENSIONS

Length	9 mm
Width	56,58 mm
Height	13 mm
Width left	3,24 mm
Width right	2,54 mm
Drillhole diameter	1,3 mm

Diameter of the connection pin	1 mm
Length of pin	3,8 mm

CONNECTION DATA

Connector type/principle	Wire protection
Number of levels	1
Angle of PCB/wire connection	90° (vertically upwards)
Type of attachment to PCB	Connecting contact
Electrical connection type to PCB	Solder
Cross section single wire from	0,2 mm ²
Cross section single wire to	2,5 mm ²
Cross section stranded wire from	0,2 mm ²
Cross section stranded with ferrule to	2,5 mm ²
Cross section stranded wire to	2,5 mm ²
Cross section stranded with ferrule from	0,2 mm ²
Rated wire cross section to (AWG)	12
Rated wire cross section from (AWG)	22
Stripping length	6 mm
Screw size	M 3
Torque	0,5 Nm

MATERIALS

Housing material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-30 °C
Operating temperature to	105 °C
Screw material	Steel
Clamp material	Brass
Wire protection	Stainless steel

APPROVALS

UL test standard	UL 1059
Rated voltage UL	300 V
Rated current UL	20 A
cUL test standard	CSA 22.2 No.158
Rated voltage cUL	300 V

Rated current cUL	20 A
VDE test standard	DIN EN 60998
Rated voltage VDE	250 V
Rated current VDE	24 A

ADDITIONAL DATA

Glow wire ignition temperature (GWIT)	GWIT 775
Insulation resistance	$1 \cdot 10^{13} \Omega \times \text{cm}$
Recommended wave soldering temperature	265 °C
Pack size	50
Country of origin	QU
Tariff code	85369010
Glow wire flammability index (GWFI)	GWFI 850
Weight	13,55 g
Recommended wave solder duration min	3 s
GWFI after-glow time	30 s
GWIT exposure time	5 s
Recommended wave solder duration max	4 s
Current creepage resistance	CTI 600
Connection cycles acc. to standard	5

