


## EMC - ANTI-KINK PROTECTION

Progress® MS EMC FKM

1080.08.52.035

Gland EMC NPB, sleeve, M8, spring sleeve, ø2.5...  
3.5mm

- Permanent contact pressure
- 360° contact sleeve construction
- Stainless steel spring
- -40°C...+100°C
- IP68

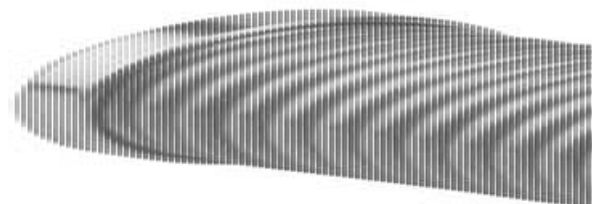

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Thread Size (G)	M8
Insert Type	One-Piece
Cable diameter min	2,5 mm
Cable diameter max	3,5 mm
IP class	IP 68, IP 69 further protection

#### DIMENSIONS

Thread pitch	1,25
Thread length	5 mm
Height (H)	50 mm
Spanner width (AF)	11 mm

#### MATERIALS

Material	Nickel-plated brass
Materials O-ring	NBR
Material of seals	TPE

<b>Nozzle material</b>	Stainless steel A2
<b>Temperature range</b>	-40°C ... +100°C

## APPROVALS

<b>Approvals</b>	SEV, CE, DNV, EAC, VDE
<b>Strain relief</b>	Version A acc. to EN 62444

## ADDITIONAL DATA

<b>Pack size</b>	10
<b>Country of origin</b>	CH
<b>Tariff code</b>	74199949
<b>Weight</b>	16,5 g
<b>Additional features</b>	Metric coarse-pitch thread (with VDE test report)

