


EMC RAPID

Progress® EMC Rapid

1081.12.060

Gland EMC Rapid, contact disc, M12, ø4.5...6mm

- Quick assembly
- Contact disc shield connection
- Low contact resistance
- -40°C...+100°C
- IP 68 up to 10 bar, IP69K

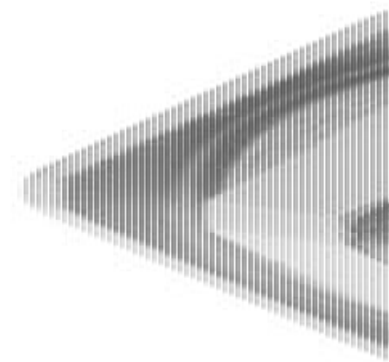

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

| | |
|--------------------|--|
| Thread Size (G) | M12 |
| Insert Type | One-Piece |
| Cable diameter min | 4,5 mm |
| Cable diameter max | 6 mm |
| IP class | IP 68 (up to 10 bar), IP 69 further protection |

DIMENSIONS

| | |
|--------------------|-------|
| Thread pitch | 1,5 |
| Thread length | 5 mm |
| Height (H) | 20 mm |
| Spanner width (AF) | 15 mm |

MATERIALS

| | |
|-------------------|---------------------|
| Material | Nickel-plated brass |
| Materials O-ring | NBR |
| Material of seals | TPE |

| | |
|-------------------------|---------------------|
| Contact sleeve material | Nickel-plated brass |
| Contact disc material | Stainless steel A2 |
| Temperature range | -40°C ... +100°C |

APPROVALS

| | |
|---------------|-------------------------------|
| Approvals | SEV, CE, cRUus, DNV, EAC, VDE |
| Strain relief | Version A acc. to EN 62444 |

ADDITIONAL DATA

| | |
|-------------------|----------|
| Pack size | 50 |
| Country of origin | CH |
| Tariff code | 74199949 |
| Weight | 14,42 g |

