


NICKEL PLATED EX E II - CONTACT SLEEVE

Progress® MS EX

EX1000.08.035
Gland Ex NPB, Ex e II, M8, ø2.5...3.5mm

- Ex e II
- -60°...+100°C
- IECEx approvals
- IP68 up to 10 bar

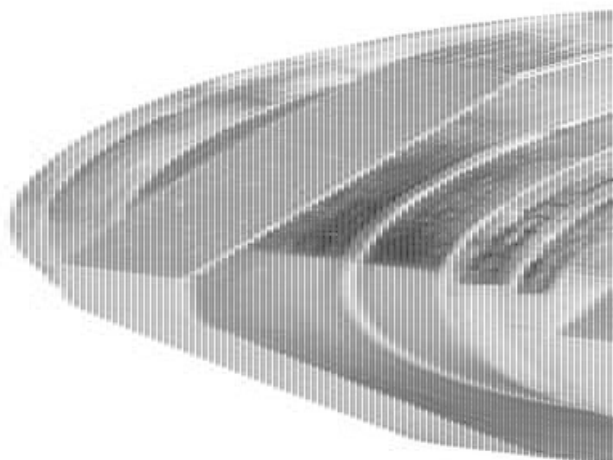

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Thread Size (G)	M8
Insert Type	One-Piece
Cable diameter min	3 mm
Cable diameter max	3,5 mm
IP class	IP 66 / IP 68 (up to 10 bar)

DIMENSIONS

Thread pitch	1,25
Thread length	5 mm
Height (H)	14 mm
Spanner width (AF)	11 mm

MATERIALS

Material	Nickel-plated brass
Materials O-ring	FPM
Material of seals	TPE

Temperature range	-60°C ... +100°C
-------------------	------------------

APPROVALS

Approvals	CE, DNV, EX, IECEx
-----------	--------------------

Test standard	IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31
---------------	---

Ex zones	Gas 1 and 2 / dust 21 and 22
----------	------------------------------

Ex-Zone gas	II 2G Ex eb IIC Gb
-------------	--------------------

EX-zone dust	II 2D Ex tb IIC Db
--------------	--------------------

IECEX certificate	IECEX SEV 15.0019X
-------------------	--------------------

Certificate	SEV 15 ATEX 0152X
-------------	-------------------

ADDITIONAL DATA

Pack size	50
-----------	----

Country of origin	CH
-------------------	----

Tariff code	74199949
-------------	----------

Weight	6,26 g
--------	--------

Additional features	Metric coarse-pitch thread (with VDE test report)
---------------------	---

