


## SYNTHETIC GFK EX - EX E II, EX I II

Progress GFK Ex

EX1530.17.060

Gland Ex synthetic, Ex e II, Ex i II, blue, M16, ø4.5...  
6mm

- Ex e II, Ex i II
- Intrinsically Safe - Blue
- -20°C...+85°C
- IECEx approved
- IP66/IP68 up to 10 bar

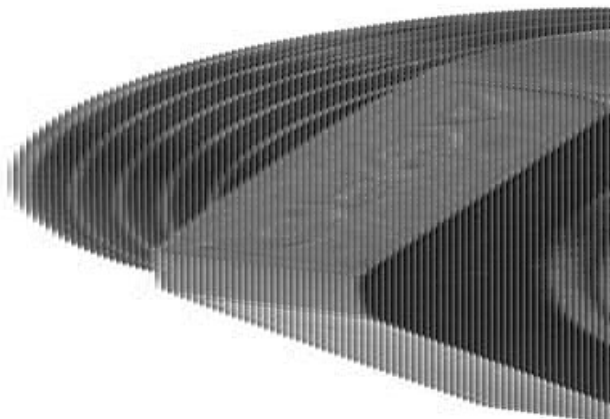

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Thread Size (G)	M16
Insert Type	One-Piece
Cable diameter min	4,5 mm
Cable diameter max	6 mm
IP class	IP 66 / IP 68 (up to 10 bar)
Colour	Black / light blue

#### DIMENSIONS

Thread pitch	1,5
Thread length	12 mm
Height (H)	26 mm
Spanner width (AF)	21 mm

#### MATERIALS

Material	Fiberglass reinforced polyamide
Material of seals	NBR, TPE

Temperature range	-20°C ... +85°C
-------------------	-----------------

## APPROVALS

Approvals	CE, DNV, EX, IECEx
-----------	--------------------

Test standard	IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31
---------------	---

Ex zones	Gas 0, 1 and 2 / dust 20, 21 and 22
----------	-------------------------------------

Ex-Zone gas	II 2G Ex eb IIC Gb
-------------	--------------------

EX-zone dust	II 2D Ex tb IIIC Db
--------------	---------------------

Intrinsic safety gas	II 2G Ex ia IIC Ga
----------------------	--------------------

Intrinsic safety dust	II 2D Ex ia IIIC Da
-----------------------	---------------------

IECEx certificate	IECEx SEV 15.0019X
-------------------	--------------------

Certificate	SEV 15 ATEX 0152X
-------------	-------------------

## ADDITIONAL DATA

Pack size	50
-----------	----

Country of origin	CH
-------------------	----

Tariff code	39269000
-------------	----------

Weight	11,88 g
--------	---------