


ULTRA FLAT

Progress® ultraFLAT

1040.17.40.065
Gland ultraFLAT, M16, ø5...6.5mm

- Flush fitting
- Ideal for restricted space
- Externally tamperproof
- -40°C...+100°C
- IP68 up to 10 bar, IP69

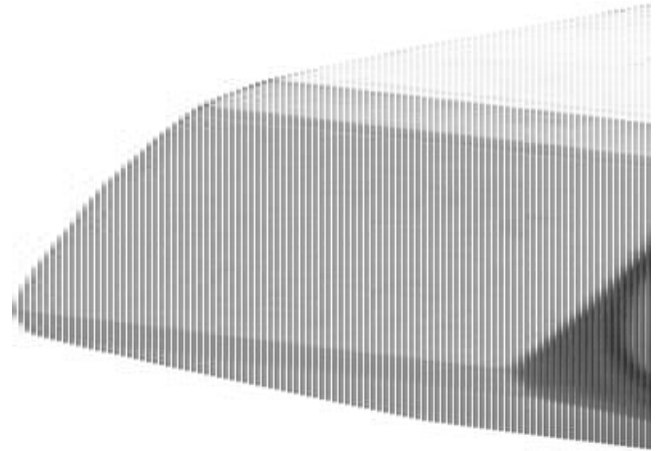

PRODUCT DESCRIPTION

The Progress® ultraFLAT is a flush mount cable gland designed application areas such as:

- Clean rooms
- Food industry
- Anti-vandalism
- Aesthetic design

The ultra-flat construction of the Progress® ultraFLAT cable gland prevents any manipulation from the outside. No external nut is visible on the external side of the gland.

In addition, the cable gland has been designed with an attractive shape, which is less industrial looking and more 'design' friendly to the eye.

The Progress® ultraFLAT cable gland offers very little surface trap points for contamination, so is ideally suited for wash down environments, which is crucial for cleanroom and food applications. These food EHEDG certified glands are easily recognised, as they have a blue coloured FKM seal which have been cleared by the FDA.

The range includes nickel plated brass and stainless steel, with high-temperature or FDA cleared sealing inserts.

TECHNICAL DATA

GENERAL DATA

Cable diameter min	5 mm
Thread Size (G)	M16
Cable diameter max	6,5 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection
Insert Type	One-Piece

DIMENSIONS

Thread pitch	1,5
External diameter (□A)	22 mm
Height (H)	4 mm
Wall thickness	5mm max.
Spanner width (AF)	19 mm
Thread length	21 mm

MATERIALS

Material	Semi-bright nickel-plated brass
Inner-nut material	Nickel-plated brass
Material of seals	TPE
Temperature range	-40°C ... +100°C
Sealing washer material	FPM

APPROVALS

Strain relief	Version A acc. to EN 62444
Approvals	CE

ADDITIONAL DATA

Pack size	25
Country of origin	CH
Tariff code	74199949
Weight	31,76 g

