


SYNTEC NICKEL PLATED BRASS

Syntec®

1045.12.050
Gland Syntec NPB, M12, \varnothing 1...5mm

- Trapezoidal strain relief
- Lamellar technology
- -40°C...+100°C
- Polyamide PA 6 insert
- IP68

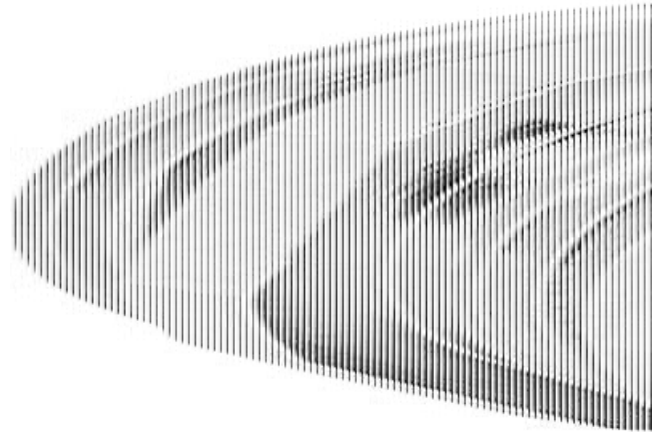

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Cable diameter min	1 mm
Thread Size (G)	M12
Cable diameter max	5 mm
IP class	IP 68
Insert Type	One-Piece

DIMENSIONS

Thread pitch	1,5
Height (H)	17 mm
Spanner width (AF)	15 mm
Thread length	5 mm

MATERIALS

sealing ring material	TPE
Lamellar insert material	Polyamide
Materials O-ring	NBR

Temperature range	-40°C ... +100°C
-------------------	------------------

APPROVALS

Strain relief	Version A acc. to EN 62444
Approvals	CE, cRUus, DNV, EAC, VDE

ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	12,96 g



