


## EMC HIGH TEMPERATURE - CONTACT SLEEVE

Progress® MS EMC HT

1080.10.91.040  
Gland EMC NPB, sleeve, High temp, M10, ø3...4mm

- Permenant contact pressure
- 360° contact sleeve construction
- -40°C...+200°C
- IP68 up to 10 bar, IP69K

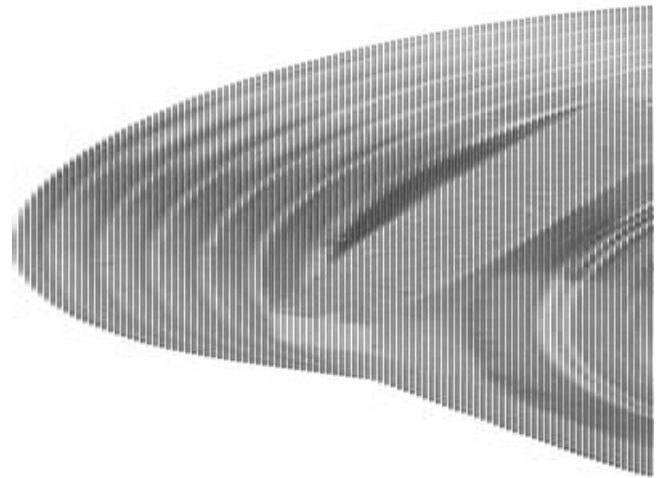

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Cable diameter min	3 mm
Thread Size (G)	M10
Cable diameter max	4 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection
Insert Type	One-Piece

#### DIMENSIONS

Thread pitch	1,5
Height (H)	16 mm
Spanner width (AF)	13 mm
Thread length	5 mm

#### MATERIALS

Material	Nickel-plated brass
Materials O-ring	FPM
Material of seals	FPM

<b>Temperature range</b>	-40°C ... +200°C
--------------------------	------------------

<b>Contact sleeve material</b>	Nickel-plated brass
--------------------------------	---------------------

## APPROVALS

<b>Strain relief</b>	Version A acc. to EN 62444
----------------------	----------------------------

<b>Approvals</b>	EAC
------------------	-----

## ADDITIONAL DATA

<b>Pack size</b>	50
------------------	----

<b>Country of origin</b>	CH
--------------------------	----

<b>Tariff code</b>	74199949
--------------------	----------

<b>Additional features</b>	Metric coarse-pitch thread
----------------------------	----------------------------

<b>Weight</b>	10,86 g
---------------	---------