


EMC - CONTACT SLEEVE

Progress® MS EMC

1080.10.040

Gland EMC NPB, sleeve, M10, ø3...4mm

- Permanent contact pressure
- 360° contact sleeve construction
- -40°C...+100°C
- IP68 up to 10 bar, IP69K

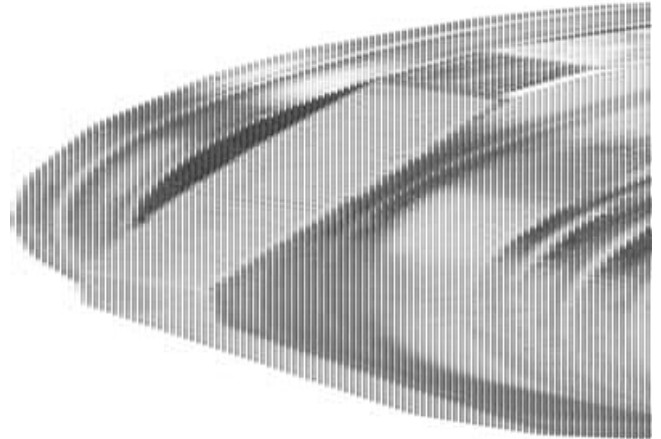

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Cable diameter min	3 mm
Thread Size (G)	M10
Cable diameter max	4 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection
Insert Type	One-Piece

DIMENSIONS

Thread pitch	1,5
Height (H)	16 mm
Spanner width (AF)	13 mm
Thread length	5 mm

MATERIALS

Material	Nickel-plated brass
Materials O-ring	NBR
Material of seals	TPE

Temperature range	-40°C ... +100°C
Contact sleeve material	Nickel-plated brass

APPROVALS

Strain relief	Version A acc. to EN 62444
Approvals	SEV, CE, cRUus, DNV, EAC, VDE

ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Additional features	Metric coarse-pitch thread (with VDE test report)
Weight	10,3 g