


EMC RAPID

Progress® EMC Rapid

1081.12.060

Gland EMC Rapid, contact disc, M12, ø4.5...6mm

- Quick assembly
- Contact disc shield connection
- Low contact resistance
- -40°C...+100°C
- IP 68 up to 10 bar, IP69K

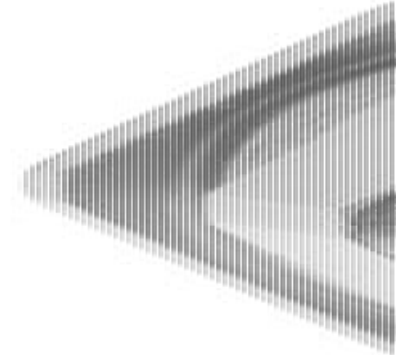

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Cable diameter min	4,5 mm
Thread Size (G)	M12
Cable diameter max	6 mm
IP class	IP 68 (up to 10 bar), IP 69 further protection
Insert Type	One-Piece

DIMENSIONS

Thread pitch	1,5
Height (H)	20 mm
Spanner width (AF)	15 mm
Thread length	5 mm

MATERIALS

Contact disc material	Stainless steel A2
Material	Nickel-plated brass
Materials O-ring	NBR

Material of seals	TPE
Temperature range	-40°C ... +100°C
Contact sleeve material	Nickel-plated brass

APPROVALS

Strain relief	Version A acc. to EN 62444
Approvals	SEV, CE, cRUus, DNV, EAC, VDE

ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	14,42 g