


## 90° ELBOW GLANDS AND 45°/90° ELBOWS

Progress® Elbow

5200.12  
Gland NPB, 90° elbow, M12, ø5...6.5mm

- Nickel plated brass
- Ideal for tight spaces
- thread adaptor versions
- -40°C...+100°C
- up to IP68

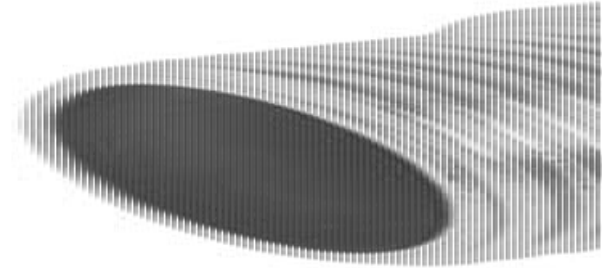

### PRODUCT DESCRIPTION

The popular Progress® range of nickel-plated brass are also available with 90° elbow, so ideal for tight spaces.

In addition to the glands, there are also a range of 90° and 45° elbows with internal & external threads to give additional flexibility.

## TECHNICAL DATA

### GENERAL DATA

Cable diameter min	5 mm
Thread Size (G)	M12
Cable diameter max	6,5 mm
IP class	IP 68
Insert Type	One-Piece

### DIMENSIONS

Thread pitch	1,5
Height (H)	27 mm
Spanner width (AF)	15 mm
Centres (A)	11 mm
Width (B)	32 mm
Thread length	8 mm

## MATERIALS

Material	Nickel-plated brass
Material of seals	TPE
Temperature range	-40°C ... +100°C

## APPROVALS

Entry thread IP class	IP 68, if entry thread is sealed
Strain relief	Version A acc. to EN 62444
Approvals	SEV, CE, DNV, EAC, VDE

## ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Weight	24,08 g