


## NICKEL PLATED EX E II - CONTACT SLEEVE

Progress® MS EX

EX1000.08.035  
Gland Ex NPB, Ex e II, M8, ø2.5...3.5mm

- Ex e II
- -60°...+100°C
- IECEx approvals
- IP68 up to 10 bar

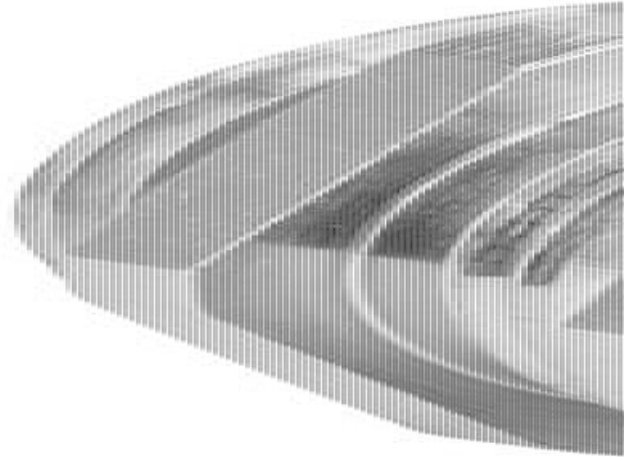

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Cable diameter min	3 mm
Thread Size (G)	M8
Cable diameter max	3,5 mm
IP class	IP 66 / IP 68 (up to 10 bar)
Insert Type	One-Piece

#### DIMENSIONS

Thread pitch	1,25
Height (H)	14 mm
Spanner width (AF)	11 mm
Thread length	5 mm

#### MATERIALS

Material	Nickel-plated brass
Materials O-ring	FPM
Material of seals	TPE

Temperature range -60°C ... +100°C

## APPROVALS

Ex-Zone gas	II 2G Ex eb IIC Gb
Test standard	IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31
Ex zones	Gas 1 and 2 / dust 21 and 22
IECEX certificate	IECEX SEV 15.0019X
EX-zone dust	II 2D Ex tb IIC Db
Certificate	SEV 15 ATEX 0152X
Approvals	CE, DNV, EX, IECEX

## ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	74199949
Additional features	Metric coarse-pitch thread (with VDE test report)
Weight	6,26 g

