


FLAMEPROOF COMPACT NICKEL PLATED

Flameproof Compact

EX1126.17.070
Gland Ex Compact NPB, Ex d IIC, Ex e II, M16, ø3...
7mm

- Ex d IIC/ Ex e II
- -60°C...+105°C
- Clamped versions
- IECEx approved
- IP68 up to 30 bar

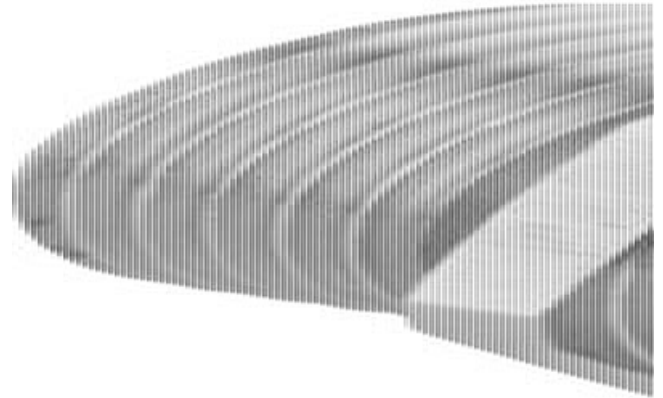

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Cable diameter min	3 mm
Thread Size (G)	M16
Cable diameter max	7 mm
IP class	IP 68 (30 bar)
Insert Type	One-Piece

DIMENSIONS

Thread pitch	1,5
Height (H)	26 mm
Spanner width (AF)	21 mm
Thread length	12 mm

MATERIALS

Material	Nickel-plated brass
Materials O-ring	FPM
Material of seals	NBR

Temperature range -60°C ... +105°C

APPROVALS

Ex-Zone gas	II 2G Ex db eb IIC
Test standard	IEC EN 60079-0 / IEC EN 60079-1 / IEC EN 60079-7 / IEC EN 60079-31
Ex zones	Gas 1 and 2 / dust 21 and 22
IECEX certificate	IECEX PTB 12.0055X
EX-zone dust	II 2D Ex ta IIC
Certificate	PTB 10 ATEX 1034X
Approvals	CE, DNV, EX, IECEX

ADDITIONAL DATA

Pack size	25
Country of origin	CH
Tariff code	74199949
Weight	57,96 g

