


## SYNTHETIC GFK EX E II

Progress® GFK Ex

EX1540.17.060

Gland Ex synthetic, Ex e II, black, M16, ø4.5...6mm

- Ex e II
- -20°C...+85°C
- IECEx approved
- IP66/IP68 up to 10 bar

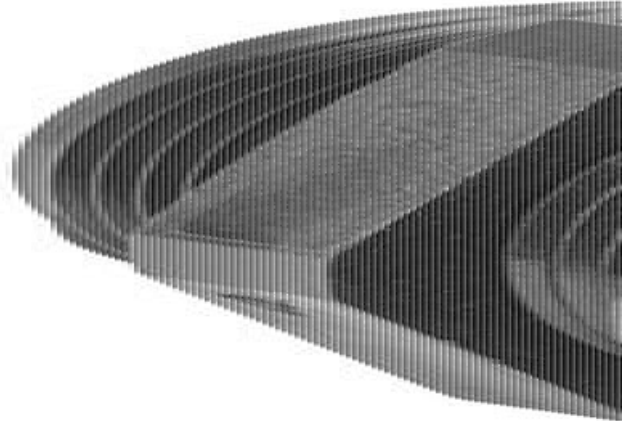

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Colour	Black RAL 9005
Cable diameter min	4,5 mm
Thread Size (G)	M16
Cable diameter max	6 mm
IP class	IP 66 / IP 68
Insert Type	One-Piece

#### DIMENSIONS

Thread pitch	1,5
Height (H)	26 mm
Spanner width (AF)	21 mm
Thread length	12 mm

#### MATERIALS

Material	Fiberglass reinforced polyamide
Material of seals	NBR, TPE

<b>Temperature range</b>	-20°C ... +85°C
--------------------------	-----------------

## APPROVALS

<b>Ex-Zone gas</b>	II 2G Ex eb IIC Gb
--------------------	--------------------

<b>Test standard</b>	IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31
----------------------	---

<b>Ex zones</b>	Gas 1 and 2 / dust 21 and 22
-----------------	------------------------------

<b>IECEX certificate</b>	IECEX SEV 15.0019X
--------------------------	--------------------

<b>EX-zone dust</b>	II 2D Ex tb IIIC Db
---------------------	---------------------

<b>Certificate</b>	SEV 15 ATEX 0152X
--------------------	-------------------

<b>Approvals</b>	CE, DNV, EX, IECEX
------------------	--------------------

## ADDITIONAL DATA

<b>Pack size</b>	50
------------------	----

<b>Country of origin</b>	CH
--------------------------	----

<b>Tariff code</b>	39269000
--------------------	----------

<b>Weight</b>	11,88 g
---------------	---------