

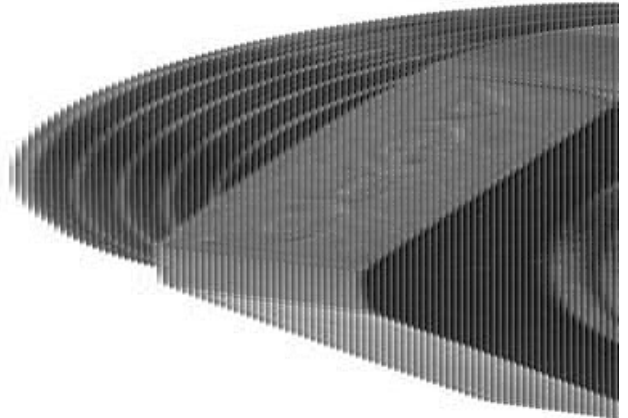
**SYNTHETIC GFK EX - EX E II, EX I II**

Progress GFK Ex

EX1530.17.060

Gland Ex synthetic, Ex e II, Ex i II, blue, M16, ø4.5...  
6mm

- Ex e II, Ex i II
- Intrinsically Safe - Blue
- -20°C...+85°C
- IECEx approved
- IP66/IP68 up to 10 bar

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

<b>Colour</b>	Black / light blue
<b>Cable diameter min</b>	4,5 mm
<b>Thread Size (G)</b>	M16
<b>Cable diameter max</b>	6 mm
<b>IP class</b>	IP 66 / IP 68 (up to 10 bar)
<b>Insert Type</b>	One-Piece

**DIMENSIONS**

<b>Thread pitch</b>	1,5
<b>Height (H)</b>	26 mm
<b>Spanner width (AF)</b>	21 mm
<b>Thread length</b>	12 mm

**MATERIALS**

<b>Material</b>	Fiberglass reinforced polyamide
<b>Material of seals</b>	NBR, TPE

Temperature range	-20°C ... +85°C
-------------------	-----------------

## APPROVALS

Ex-Zone gas	II 2G Ex eb IIC Gb
Test standard	IEC EN 60079-0 / IEC EN 60079-7 / IEC EN 60079-31
Ex zones	Gas 0, 1 and 2 / dust 20, 21 and 22
Intrinsic safety dust	II 2D Ex ia IIIC Da
Intrinsic safety gas	II 2G Ex ia IIC Ga
IECEX certificate	IECEX SEV 15.0019X
EX-zone dust	II 2D Ex tb IIIC Db
Certificate	SEV 15 ATEX 0152X
Approvals	CE, DNV, EX, IECEX

## ADDITIONAL DATA

Pack size	50
Country of origin	CH
Tariff code	39269000
Weight	11,88 g