

## MINIMOTOR - BC2000 WORM GEARED MOTOR

BC2000M-280  
230V 1 ph 280rpm 0.59Nm

- Single or three phase
- 18 to 20W delivered power
- Up to 3.05Nm rated torque
- Compact and powerful
- IP65 as standard



### PRODUCT DESCRIPTION

High quality, designed from the ground up to IP65 rated compact gear motor.

Physically smaller than the majority of similar powered gear motors due to the use of high quality components in precision manufacturing.

Ideally suited to many applications, including label and packaging machines, conveyors, pharmaceutical and medical machinery


**MOTOR:** Single and three phase with 2 poles. Totally enclosed with external ventilation. Safety thermal cutout on single phase model. Class F winding. IP65 protection according to CEI EN 60529.

**GEAR UNIT:** Die-cast aluminium case (UNI 5076). Centre distance 20 mm. Bronze ring with hardness 110 HB. Hardened steel screw with ground thread. Fluoridated polymer (FPM) grommets. Lubrication with synthetic oil (EP). 6 reduction gear ratios are available: 10/15/25/45/60/80..

[Please click here for 2D and 3D drawings](#)

### TECHNICAL DATA

Capacitor	2 $\mu$ F
Input voltage ac	230V
IP class	IP65
Nominal speed	280 rpm
Nominal torque	0,59 Nm
Output power	18 W
Rated current	0.27A A
Ratio	10:1

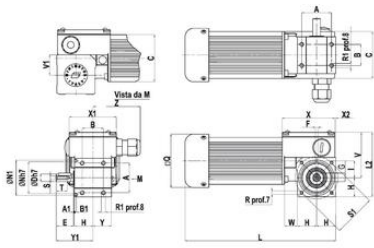

Tipologia	A	B	C	D	E	F	G	H	I	L	L2	M	N	O	R	S	S1	T	V	V1	X	X1	X2	Y	Y1	W	Z			
BC2000	35	1	25	24	35,5	9	20,5	3	10,2	22	20	170	77	38	42	63	M4	M5	M4	50	13	35	24	62	55,5	1	22	43	15	50

3D model selection



Electric motor

15.06.2017



Sensored motor

15.06.2017



Worm gearmotors

15.06.2017



Brushless servomotors

15.06.2017



Clean products

15.06.2017



Direct

15.06.2017

Please see product description above for 2D and 3D drawings