


## MODULAR TERMINALS FOR 3-WIRE AND 4-WIRE DEVICES - ZIZA/ZMP

ZIZA, ZMP

3528.2

ZIZA 1.5/3, 3 wire Initiator base terminal with foot

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

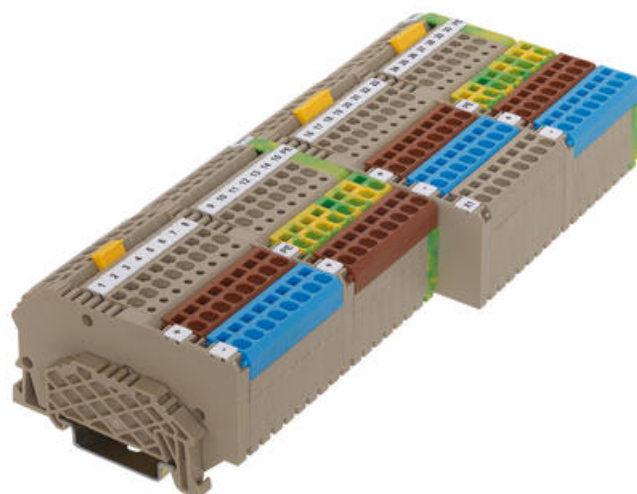

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Rated wire cross section	1,5 mm <sup>2</sup>
Colour	Beige
Rated voltage IEC	400 V
Rated current IEC	17,5 A
Mounting	TS 35
Rated impulse voltage	4 kV
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR

#### DIMENSIONS

Length	68,7 mm
Width	5,1 mm
Height TS 35/7.5	40,5 mm

#### CONNECTION DATA

Connections	4
Number of levels	1

Plug gauge acc. EN 60 947-1	A1
Cross connect channels	1
Number of test pick off options	0
Cross section single wire from	0,5 mm <sup>2</sup>
Cross section single wire to	2,5 mm <sup>2</sup>
Cross section stranded wire from	0,5 mm <sup>2</sup>
Cross section stranded wire to	2,5 mm <sup>2</sup>
Cross section stranded with ferrule from	0,5 mm <sup>2</sup>
Cross section stranded with ferrule to	1,5 mm <sup>2</sup>
Rated wire cross section from (AWG)	26
Rated wire cross section to (AWG)	14
Stripping length	8 mm

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

## APPROVALS

UL test standard	UL 1059
Rated voltage CSA	300 V
Rated current CSA	12,5 A
CSA test standard	C22.2 No 158
Rated voltage CSAus	300 V
Rated current CSAus	12,5 A
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
GL test standard	IEC 60947-7-1:2009
KEMA KEUR test standard	EN 60947-7-1:2009

## ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	7 g

