




## PLUG-IN CONNECTION SYSTEM - ZST

3650.2

ZRKS 2.5/1A/1S, Feed-through, 1 cable, 1 plug, Beige

- Wire connection type: tension-spring connection
- Versatile mounting on TS15, TS35 or as free coupling
- Ratings 500 V, 24 A
- Touch-safe construction

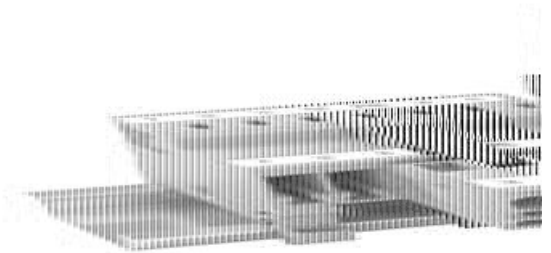

### PRODUCT DESCRIPTION

The plug-in connection system ZST is a plug-in system that allows you to achieve a rated current up to 24 A with a rated voltage up to 500 V.

The terminals and the pluggable connectors have a touch-safe design and can be configured easily and combined according to the particular needs of your application.

The basic terminals and connectors can also be coded to make sure the correct plug is mated with the correct socket, when using multiple sets.

All plugs & base terminals have the option of additional snap-on locking latches and strain relief mechanism to ensure that the connected wire and plugs are firmly secured

The ZSTK 2.5 couplings are available as rail-mounted version (for TS15 and TS35) or as a free coupling.

## TECHNICAL DATA

### GENERAL DATA

---

Rated wire cross section	2,5 mm <sup>2</sup>
Colour	Beige
Rated voltage IEC	500 V
Rated current IEC	24 A
Mounting	TS 35
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, CSA US, cUL, KEMA KUR, EAC

## DIMENSIONS

Length	54 mm
Width	5,1 mm
Height TS 35/7.5	39,5 mm
Height	38,5 mm

## CONNECTION DATA

Connections	2
Plug gauge acc. EN 60 947-1	A3
Cross connect channels	2
Number of test pick off options	1
Cross section single wire from	0,5 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>
Cross section stranded wire from	0,5 mm <sup>2</sup>
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section stranded with ferrule from	0,5 mm <sup>2</sup>
Cross section stranded with ferrule to	2,5 mm <sup>2</sup>
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	12
Stripping length	10 mm

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C

Operating temperature to	120 °C
--------------------------	--------

## APPROVALS

Rated voltage UL	300 V
------------------	-------

Rated current UL	20 A
------------------	------

UL test standard	UL 1059
------------------	---------

Rated voltage CSA	300 V
-------------------	-------

Rated current CSA	20 A
-------------------	------

CSA test standard	C22.2 No 158
-------------------	--------------

Rated voltage CSAus	300 V
---------------------	-------

Rated current CSAus	20 A
---------------------	------

CSAus test standard	UL 1059
---------------------	---------

Rated voltage cUL	300 V
-------------------	-------

Rated current cUL	20 A
-------------------	------

cUL test standard	C22.2 No 158
-------------------	--------------

EAC test standard	TR ZU 004/2011
-------------------	----------------

KEMA KEUR test standard	EN 60947-7-1:2009
-------------------------	-------------------

## ADDITIONAL DATA

Tariff code	85369010
-------------	----------

Country of origin	CZ
-------------------	----

Weight	6,76 g
--------	--------

Pack size	100
-----------	-----

