


## TRIPLE DECK TERMINALS - ZIKD 2.5MM<sup>2</sup>

ZIKD

3590.1  
ZIKD 2,5 GN

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

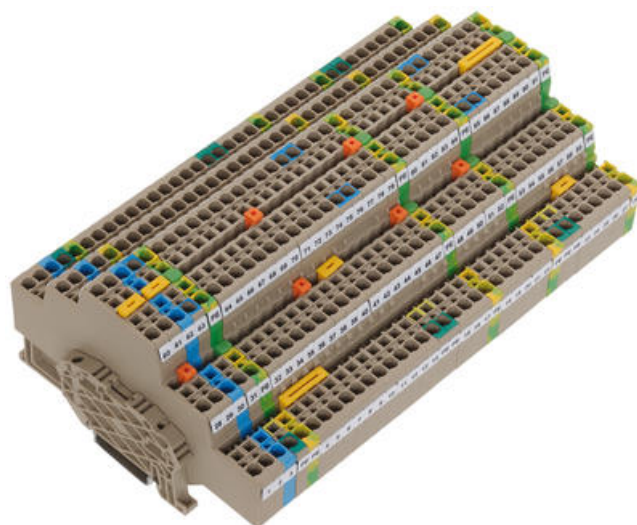

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Rated wire cross section	2,5 mm <sup>2</sup>
Colour	Green
Rated voltage IEC	500 V
Rated current IEC	24 A
Mounting	TS 35
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC

#### DIMENSIONS

Length	116,2 mm
Width	5,1 mm
Height TS 35/7.5	68 mm

#### CONNECTION DATA

Connections	3 x 2
Number of levels	3

Plug gauge acc. EN 60 947-1	A3
Cross connect channels	3
Number of test pick off options	6
Cross section single wire from	0,5 mm <sup>2</sup>
Cross section single wire to	4 mm <sup>2</sup>
Cross section stranded wire from	0,5 mm <sup>2</sup>
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section stranded with ferrule from	0,5 mm <sup>2</sup>
Cross section stranded with ferrule to	2,5 mm <sup>2</sup>
Rated wire cross section from (AWG)	20
Rated wire cross section to (AWG)	12
Stripping length	10 mm

## MATERIALS

Insulation material	Polyamide 6.6
Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C

## APPROVALS

Rated voltage UL	300 V
Rated current UL	15 A
UL test standard	UL 1059
Rated voltage CSA	300 V
Rated current CSA	15 A
CSA test standard	C22.2 No 158
Rated voltage CSAus	300 V
Rated current CSAus	15 A
CSAus test standard	UL 1059
Rated voltage cUL	300 V
Rated current cUL	15 A
cUL test standard	C22.2 No 158
GL test standard	IEC 60947-7-1:2009
EAC test standard	TR ZU 004/2011
KEMA KEUR test standard	EN 60947-7-1:2009

## ADDITIONAL DATA

Tariff code	85369010
Country of origin	CZ
Weight	17,37 g
Pack size	50

