

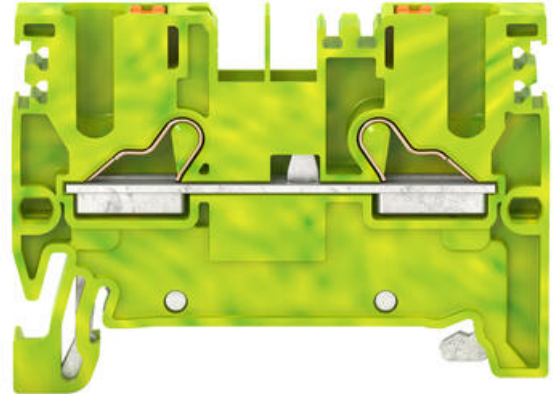
EARTH TERMINALS - PSL 1.5-10MM

PSL

27001.2

PSL 1.5/2A, 1.5mm² Push-in Earth feed through

- Snap on
- 2 to 4 connections
- Pluggable cross connectors
- Push button cable release
- Test pick off point

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Rated impulse voltage	6 kV
Colour	Green/yellow
Rated wire cross section	1,5 mm ²
Mounting	Mounting rail TS 35/7.5
Contamination degree	3
Overvoltage category	III

DIMENSIONS

Height TS 35/7.5	32 mm
Length	45 mm
Width	3,5 mm
Height	30,5 mm

CONNECTION DATA

Cross connect channels	1
Cross section stranded wire to	1,5 mm ²

Cross section single wire from	0,14 mm ²
Rated wire cross section to	14 AWG
Connections	2
Cross section stranded wire from	0,14 mm ²
Cross section stranded with ferrule from	0,14 mm ²
Rated wire cross section from	26 AWG
Cross section stranded with ferrule to	1 mm ²
Stripping length	10 mm
Cross section single wire to	1,5 mm ²
Number of levels	1
Plug gauge acc. EN 60 947-1	A1

MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

ADDITIONAL DATA

Pack size	50
Country of origin	BG
Tariff code	85369010
Weight	5,6 g
Number of terminals per level	2

