


## MINIATURE TERMINALS TS15/32/35 - RK 1.5-4, SRK 2.5

RK1.5-4, SRK 2.5

1015.1

RK1.5-4 Green, 4mm<sup>2</sup> Compact feed through, multi-foot

- Compact - ideal for small enclosures
- TS15/TS32 & TS35 range
- up to 4mm<sup>2</sup> cables
- cross connectable
- Polyimide 6.6-V2

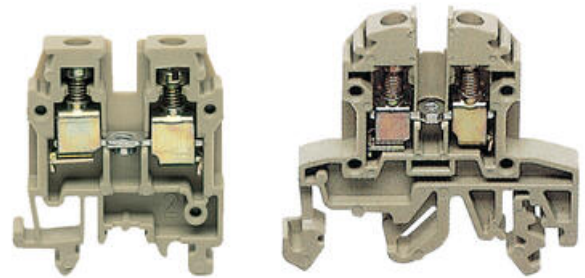

### PRODUCT DESCRIPTION

This mixed range of compact terminals is ideal for applications where space is at a premium. The SRK2.5/15 range is the most compact, sitting only 29.5mm high when mounted on TS15 rail.

Alternatively, if you do not want din rail mounted terminals, the BKA rang are also compact, but can be mounted directly in the enclosure or back plate.

## TECHNICAL DATA

### GENERAL DATA

Rated impulse voltage	6 kV
Colour	Green
Rated wire cross section	4 mm <sup>2</sup>
Rated voltage IEC	500 V
Mounting	TS 35 and TS 32
Contamination degree	3
Rated current IEC	32 A
Approvals	UL, CSA, GL, KEMA KUR, EAC
Overvoltage category	III

### DIMENSIONS

Height TS 35/7.5	43,5 mm
Length	45 mm
Width	6 mm
Height TS 32	48 mm

## CONNECTION DATA

Cross connect channels	1
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section single wire from	0,2 mm <sup>2</sup>
Torque max	1 Nm
Connections	2
Cross section stranded wire from	0,2 mm <sup>2</sup>
Torque min	0,5 Nm
Rated wire cross section to (AWG)	10
Rated wire cross section from (AWG)	22
Cross section stranded with ferrule from	0,2 mm <sup>2</sup>
Screw size	M 3
Screw type	Slotted
Cross section stranded with ferrule to	4 mm <sup>2</sup>
Stripping length	9 mm
Cross section single wire to	4 mm <sup>2</sup>
Number of levels	1
Plug gauge acc. EN 60 947-1	A4

## MATERIALS

Flammability class	UL94-V2
Operating temperature from	-40 °C
Operating temperature to	105 °C
Insulation material	Polyamide 6.6

## APPROVALS

UL test standard	UL 1059
GL test standard	IEC 60947-7-1:2002
CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-1:2009
Rated current CSA	40 A
Rated voltage CSA	300 V
EAC test standard	TR ZU 004/2011

## ADDITIONAL DATA

Pack size	100
-----------	-----

Country of origin	CZ
Tariff code	85369010
Weight	7,29 g

