


FEED THROUGH TERMINALS - SRK 2.5-120MM²

SRK

17100.0
SRK 2.5/2A Brown, 2.5mm Feed through terminal

- Pluggable cross connectors up to 35mm²
- Available in 9 colours
- 1000V rated
- Material polyamide 6.6 - UL94-V0
- Temperature resistance -40 °C...+120 °C

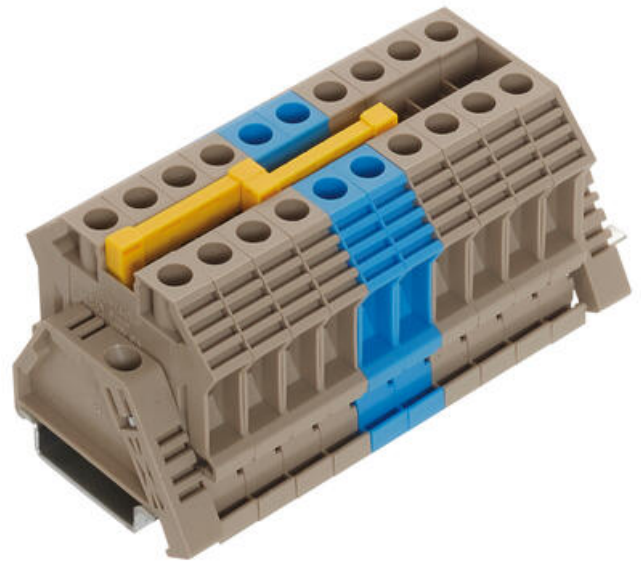

PRODUCT DESCRIPTION

Packed with innovative features

The SRK range of screw terminals from Conta Clip is packed with innovative features designed to increase connection strength, speed up your assembly times and optimize your stock.

Now available for cable sizes from 2.5mm² to 120mm²

Cutting edge design & quality materials

Conta Clip has proved it is still possible to improve the design of even the most long established components. They are characterised by their compact housing shape, exceptional stability, good vibration resistance and improved wire grip at the terminal point.

Fast assembly & connection

The easy to operate screw connection makes it easy and safe to connect both solid and flexible wires with or without ferrules. The protective earth terminals have rail connections on both sides of the foot, they simply snap onto the din-rail with no need for screws. The insulated cross connectors are pluggable and simply pushed in to place in one of two channels in the top of each terminal. These features dramatically speed up assembly time but still ensure maximum mechanical and electrical security.

Flexibility to optimize your stock

You can use a cutting tool to shorten the pluggable cross connectors as required. Once cut the exposed edge is simply covered using the innovative push on insulation cap to ensure touch protection is fully maintained. Where once many different variations of cross connectors needed to be stocked you now need

only one length of cross connectors and some end caps helping reduce inventory costs.
Available in the following colours; Yellow, Blue, Black & Red.

Clear concise marking

Most applications demand clearly marked terminals. The four way labelling channel in conjunction with a wide range of markers allows a variety of possibilities. Pre-marked labels are available with standard letters & digits or custom labels can be marked here at OEM Automatic to your exact requirements.

- Feed-through & protective earth terminals
- Compact design
- Wide range of sophisticated accessories
- Pluggable insulated cross connectors that can be easily modified to suit (up to 35mm²)
- Cross connectors can carry max rated current & voltage of the terminals
- Large wire entry bay positioned at the same level across all terminal types
- Global standards

TECHNICAL DATA

GENERAL DATA

Rated impulse voltage	8 kV
Colour	Brown
Rated wire cross section	2,5 mm ²
Explosion proof	Yes
Rated voltage IEC	1000 V
Mounting	TS 35
Contamination degree	3
Load current max	32 A
Rated current IEC	24 A
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Overvoltage category	III

DIMENSIONS

Height TS 35/7.5	47 mm
Length	48 mm
Width	5 mm

CONNECTION DATA

Cross connect channels	2
Cross section stranded wire to	4 mm ²
Cross section single wire from	0,2 mm ²
Torque max	0,8 Nm
Connections	2
Cross section stranded wire from	0,2 mm ²
Torque min	0,4 Nm

Rated wire cross section to (AWG)	12
Rated wire cross section from (AWG)	30
Cross section stranded with ferrule from	0,2 mm ²
Screw size	M 2,5
Screw type	Slotted
Cross section stranded with ferrule to	2,5 mm ²
Stripping length	10 mm
Cross section single wire to	4 mm ²
Number of levels	1
Number of test pick off options	1
Plug gauge acc. EN 60 947-1	A3

MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

APPROVALS

UL test standard	UL 1059
Rated current CSAus	25 A
GL test standard	IEC 60947-7-1:2009
Rated voltage CSAus	600 V
Rated current UL	25 A
Rated current cUL	25 A
Rated voltage UL	600 V
CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-1:2009
Rated voltage cUL	600 V
CSAus test standard	UL 1059
Rated current CSA	25 A
Rated voltage CSA	600 V
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011

ADDITIONAL DATA

Pack size	100
Country of origin	DE
Tariff code	85369010
Weight	7,11 g
Type of terminal	Screw Terminals, DIN Rail terminals

