

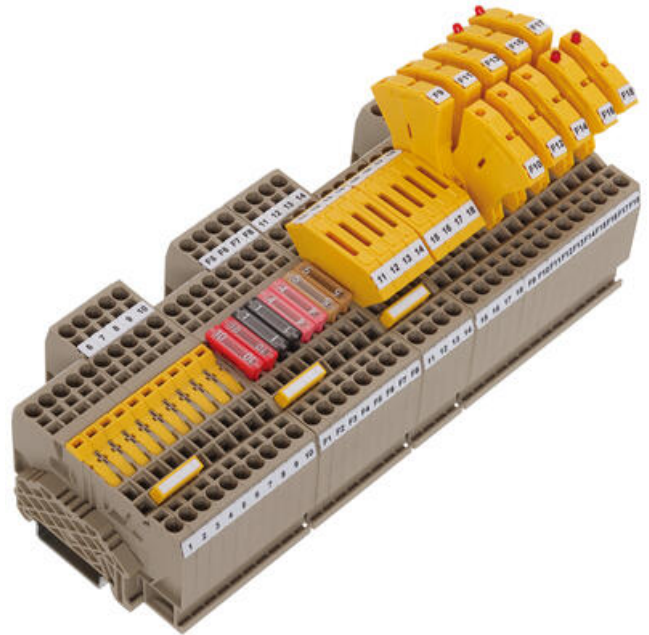
FUSE TERMINALS - FTRK/FSIK

FTRK, FSIK

3239.4

FSIK 4/2A/MT BK

- For glass tube fuses 5x20
- For automotive fuses
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Rated impulse voltage	6 kV
Colour	Black
Rated wire cross section	4 mm ²
Rated voltage IEC	400 V
Mounting	TS 35
Contamination degree	3
Rated current	18 A
Rated voltage	400 V
Fuse size	Blade Disconnect
Rated current IEC	18 A
Approvals	Pending, CSA, cCSAus, KEMA KUR
Overvoltage category	III

DIMENSIONS

Height TS 35/7.5	47 mm
Length	67,5 mm

Width	6,1 mm
Height	46 mm

CONNECTION DATA

Cross connect channels	1
Cross section stranded wire to	2,5 mm ²
Cross section single wire from	0,2 mm ²
Connections	2
Cross section stranded wire from	0,2 mm ²
Rated wire cross section to (AWG)	10
Rated wire cross section from (AWG)	24
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	2,5 mm ²
Stripping length	12 mm
Cross section single wire to	4 mm ²
Number of levels	1
Plug gauge acc. EN 60 947-1	A3

MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

APPROVALS

UL test standard	UL 1059
Rated current CSAus	15 A
Rated voltage CSAus	300 V
Rated current UL	15 A
Rated voltage UL	300 V
CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-3:2009
Rated voltage UL	300
CSAus test standard	UL 1059
Rated current CSA	15 A
Rated voltage CSA	300 V

ADDITIONAL DATA

Pack size	50
Country of origin	BG
Tariff code	85369010
Weight	13,72 g