

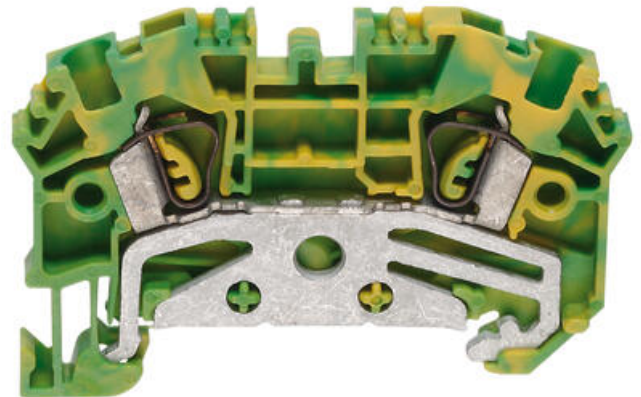
**EARTH TERMINALS - ZSL 2.5-16MM<sup>2</sup>**

ZSL, ZSLD

3510.2

ZSL2.5/2A EARTH TERM 2.5mm

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Colour	Green/yellow
Rated wire cross section	2,5 mm <sup>2</sup>
Mounting	TS 35
Contamination degree	3
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR, EAC
Overvoltage category	III

**DIMENSIONS**

Height TS 35/7.5	39 mm
Length	59 mm
Width	5,1 mm

**CONNECTION DATA**

Cross connect channels	0
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section single wire from	0,5 mm <sup>2</sup>
Connections	2
Cross section stranded wire from	0,5 mm <sup>2</sup>
Rated wire cross section to (AWG)	12
Rated wire cross section from (AWG)	20

Cross section stranded with ferrule from	0,5 mm <sup>2</sup>
Cross section stranded with ferrule to	2,5 mm <sup>2</sup>
Stripping length	10 mm
Cross section single wire to	4 mm <sup>2</sup>
Number of levels	1
Number of test pick off options	2
Plug gauge acc. EN 60 947-1	A3

## MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

## APPROVALS

UL test standard	UL 1059
GL test standard	IEC 60947-7-2:2009
CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-2:2009
CSAus test standard	UL 1059
cUL test standard	C22.2 No 158
EAC test standard	TR ZU 004/2011

## ADDITIONAL DATA

Pack size	100
Country of origin	BG
Tariff code	85369010
Weight	12 g

