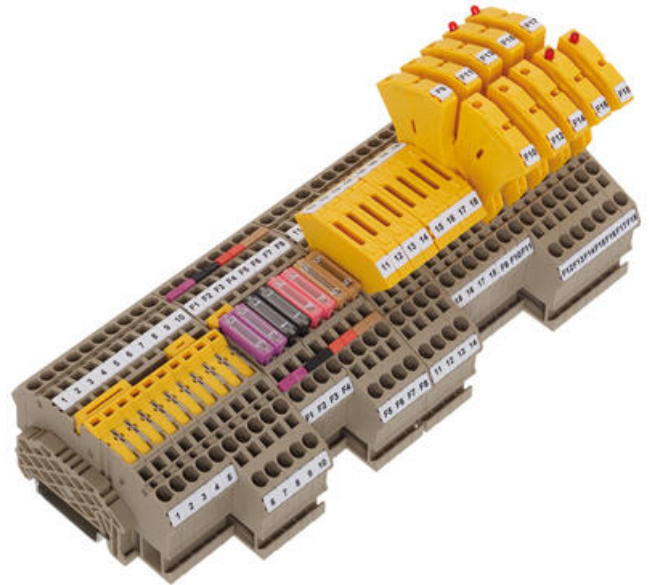


FUSE TERMINALS - ZTRK 2.5MM², OT/ZS

ZTRK/OT, ZTRK/ZS

3609.2
ZTRK 2,5/2A/OT BG

- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0
- Current limited by an automotive fuse 10 A

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Rated impulse voltage	6 kV
Colour	Beige
Rated wire cross section	2,5 mm ²
Rated voltage IEC	400 V
Mounting	TS 35
Contamination degree	3
Rated current IEC	18 A
Approvals	CSA, CSA US, KEMA KUR
Overvoltage category	III
Additional information	without function element

DIMENSIONS

Height TS 35/7.5	39,2 mm
Length	68 mm
Width	5,1 mm

CONNECTION DATA

Cross connect channels	1
Cross section stranded wire to	4 mm ²
Cross section single wire from	0,5 mm ²
Connections	2
Cross section stranded wire from	0,5 mm ²
Rated wire cross section to (AWG)	12
Rated wire cross section from (AWG)	20
Cross section stranded with ferrule from	0,5 mm ²
Cross section stranded with ferrule to	2,5 mm ²
Stripping length	10 mm
Cross section single wire to	4 mm ²
Number of levels	1
Number of test pick off options	2
Plug gauge acc. EN 60 947-1	A3

MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

APPROVALS

CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-1:2009, EN 60947-7-3:2009
CSAus test standard	UL 1059

ADDITIONAL DATA

Pack size	100
Country of origin	CZ
Tariff code	85369010
Weight	8,82 g

