

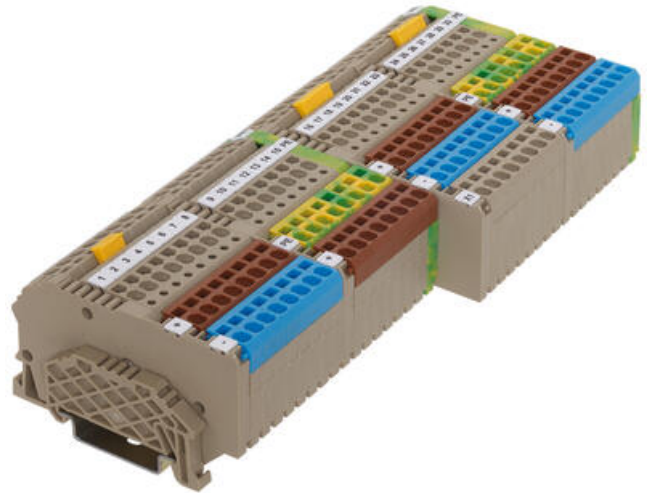
**MODULAR TERMINALS FOR 3-WIRE
AND 4-WIRE DEVICES - ZIZA/ZMP**

ZIZA, ZMP

3528.2

ZIZA 1.5/3, 3 wire Initiator base terminal with foot

- Modular connector system for 3- and 4-wire actuators
- Material polyamide 6.6
- Temperature resistance -40°C...+120°C
- Fire-resistance class V0

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Rated impulse voltage	4 kV
Colour	Beige
Rated wire cross section	1,5 mm ²
Rated voltage IEC	400 V
Mounting	TS 35
Contamination degree	3
Rated current IEC	17,5 A
Approvals	UL, CSA, GL, CSA US, cUL, KEMA KUR
Overvoltage category	III

DIMENSIONS

Height TS 35/7.5	40,5 mm
Length	68,7 mm
Width	5,1 mm

CONNECTION DATA

Cross connect channels	1
Cross section stranded wire to	2,5 mm ²
Cross section single wire from	0,5 mm ²

Connections	4
Cross section stranded wire from	0,5 mm ²
Rated wire cross section to (AWG)	14
Rated wire cross section from (AWG)	26
Cross section stranded with ferrule from	0,5 mm ²
Cross section stranded with ferrule to	1,5 mm ²
Stripping length	8 mm
Cross section single wire to	2,5 mm ²
Number of levels	1
Number of test pick off options	0
Plug gauge acc. EN 60 947-1	A1

MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

APPROVALS

UL test standard	UL 1059
Rated current CSAus	12,5 A
GL test standard	IEC 60947-7-1:2009
Rated voltage CSAus	300 V
CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-1:2009
CSAus test standard	UL 1059
Rated current CSA	12,5 A
Rated voltage CSA	300 V
cUL test standard	C22.2 No 158

ADDITIONAL DATA

Pack size	100
Country of origin	CZ
Tariff code	85369010
Weight	7 g

