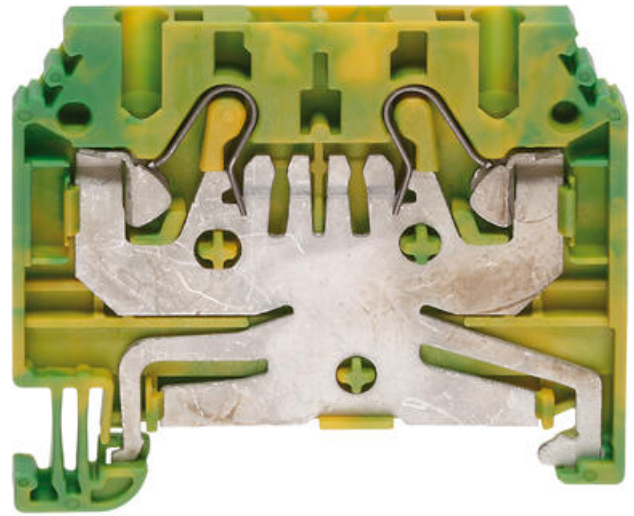


EARTH TERMINALS - FSL 1.5-16MM²

FSL

3203.2
FSL 1,5/2A GNYE

- Wiring without tools
- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Colour	Green/yellow
Rated wire cross section	1,5 mm ²
Mounting	TS 35
Contamination degree	3
Approvals	CSA, CSA US, KEMA KUR, EAC
Overvoltage category	III

DIMENSIONS

Height TS 35/7.5	43 mm
Length	48,5 mm
Width	4,1 mm

CONNECTION DATA

Cross connect channels	2
Cross section stranded wire to	1,5 mm ²
Cross section single wire from	0,2 mm ²
Connections	2
Cross section stranded wire from	0,2 mm ²

Rated wire cross section to (AWG)	16
Rated wire cross section from (AWG)	24
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	1,5 mm ²
Stripping length	12 mm
Cross section single wire to	1,5 mm ²
Number of levels	1
Plug gauge acc. EN 60 947-1	A1

MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

APPROVALS

CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-2:2009
CSAus test standard	UL 1059
EAC test standard	TR ZU 004/2011

ADDITIONAL DATA

Pack size	100
Country of origin	BG
Tariff code	85369010
Weight	8,1 g

