


## DISCONNECT TERMINALS - FTRK 2.5MM<sup>2</sup>

FTRK

3259.2  
 FTRK 2,5/2A/MT BG

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

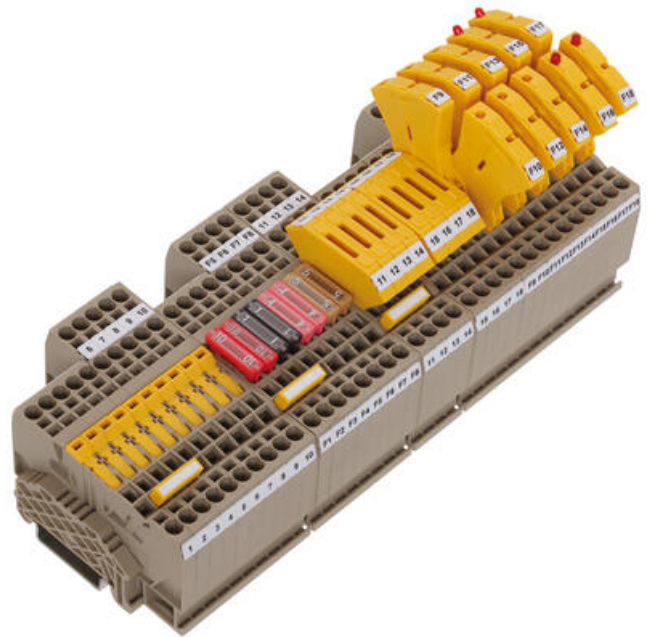

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### GENERAL DATA

Rated impulse voltage	6 kV
Colour	Beige
Rated wire cross section	2,5 mm <sup>2</sup>
Rated voltage IEC	400 V
Mounting	TS 35
Contamination degree	3
Rated current IEC	18 A
Approvals	CSA, CSA US, KEMA KUR
Overvoltage category	III
Additional information	with disconnect blade

#### DIMENSIONS

Height TS 35/7.5	45,6 mm
Length	67,5 mm
Width	5,1 mm

## CONNECTION DATA

Cross connect channels	1
Cross section stranded wire to	4 mm <sup>2</sup>
Cross section single wire from	0,2 mm <sup>2</sup>
Connections	2
Cross section stranded wire from	0,2 mm <sup>2</sup>
Rated wire cross section to (AWG)	12
Rated wire cross section from (AWG)	20
Cross section stranded with ferrule from	0,2 mm <sup>2</sup>
Cross section stranded with ferrule to	2,5 mm <sup>2</sup>
Stripping length	10 mm
Cross section single wire to	4 mm <sup>2</sup>
Number of levels	1
Plug gauge acc. EN 60 947-1	A3

## MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

## APPROVALS

Rated current CSAus	15 A
Rated voltage CSAus	300 V
CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-1:2009, EN 60947-7-3:2009
CSAus test standard	UL 1059
Rated current CSA	15 A
Rated voltage CSA	300 V

## ADDITIONAL DATA

Pack size	100
Country of origin	CZ
Tariff code	85369010
Weight	11,93 g

