


DOUBLE DECK TERMINALS - FRKD/FSLD 2.5MM²

FRKD,FSLD,

3226.1
 FRKD 2.5 Green, 2.5mm² Push-in double deck

- Wiring without tools
- Internally linked versions
- Colour coded options
- 2 and 3 connections
- Electronic component versions

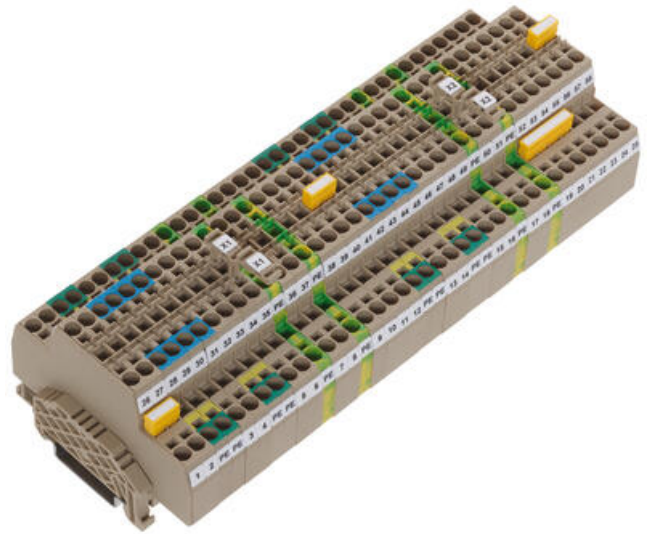

PRODUCT DESCRIPTION

TECHNICAL DATA

GENERAL DATA

Rated impulse voltage	6 kV
Colour	Green
Rated wire cross section	2,5 mm ²
Rated voltage IEC	500 V
Mounting	TS 35
Contamination degree	3
Rated current IEC	24 A
Approvals	CSA, CSA US, KEMA KUR, EAC
Overvoltage category	III

DIMENSIONS

Height TS 35/7.5	53 mm
Length	75,4 mm
Width	5,1 mm

CONNECTION DATA

Cross connect channels	2
Cross section stranded wire to	4 mm ²

Cross section single wire from	0,2 mm ²
Connections	2 x 2
Cross section stranded wire from	0,2 mm ²
Rated wire cross section to (AWG)	14
Rated wire cross section from (AWG)	26
Cross section stranded with ferrule from	0,2 mm ²
Cross section stranded with ferrule to	2,5 mm ²
Stripping length	12 mm
Cross section single wire to	4 mm ²
Number of levels	2
Plug gauge acc. EN 60 947-1	A3

MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

APPROVALS

Rated current CSAus	20 A
Rated voltage CSAus	300 V
CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-1:2009
CSAus test standard	UL 1059
Rated current CSA	20 A
Rated voltage CSA	300 V
EAC test standard	TR ZU 004/2011

ADDITIONAL DATA

Pack size	100
Country of origin	BG
Tariff code	85369010
Weight	14,57 g

