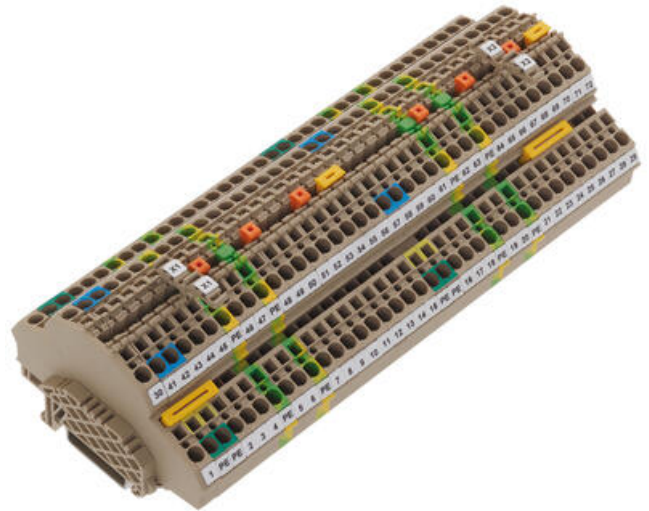


**DOUBLE DECK TERMINALS - ZRKD
2.5MM²**

ZRKD, ZSLD

3562.1
ZRKD 2,5 GN

- Material polyamide 6.6
- Temperature resistance -40 °C...+120 °C
- Flammability class V0

**PRODUCT DESCRIPTION****TECHNICAL DATA****GENERAL DATA**

Rated impulse voltage	6 kV
Colour	Green
Rated wire cross section	2,5 mm ²
Rated voltage IEC	500 V
Mounting	TS 35
Contamination degree	3
Rated current IEC	24 A
Approvals	UL, CSA, GL, CSA US, KEMA KUR, EAC
Overvoltage category	III

DIMENSIONS

Height TS 35/7.5	53 mm
Length	83,6 mm
Width	5,1 mm

CONNECTION DATA

Cross connect channels	2
Cross section stranded wire to	4 mm ²

Cross section single wire from	0,5 mm ²
Connections	2 x 2
Cross section stranded wire from	0,5 mm ²
Rated wire cross section to (AWG)	12
Rated wire cross section from (AWG)	20
Cross section stranded with ferrule from	0,5 mm ²
Cross section stranded with ferrule to	2,5 mm ²
Stripping length	10 mm
Cross section single wire to	4 mm ²
Number of levels	2
Number of test pick off options	4
Plug gauge acc. EN 60 947-1	A3

MATERIALS

Flammability class	UL94-V0
Operating temperature from	-40 °C
Operating temperature to	120 °C
Insulation material	Polyamide 6.6

APPROVALS

UL test standard	UL 1059
Rated current CSAus	10 A
GL test standard	IEC 60947-7-1:2009
Rated voltage CSAus	300 V
Rated current UL	10 A
Rated voltage UL	300 V
CSA test standard	C22.2 No 158
KEMA KEUR test standard	EN 60947-7-1:2009
CSAus test standard	UL 1059
Rated current CSA	10 A
Rated voltage CSA	300 V
EAC test standard	TR ZU 004/2011

ADDITIONAL DATA

Pack size	100
Country of origin	CZ

Tariff code	85369010
--------------------	----------

Weight	12,8 g
---------------	--------

