


EDAC INTERFACE MODULES

OE-E

15350.2
 OE-E38/36R, 36 way EDAC Interface module, 516-038
 Right, screw terminals

- EDAC 516 compatible with ELCO 8016
- Offset Plug arrangement
- Left and Right versions
- TS32/TS35 mounting

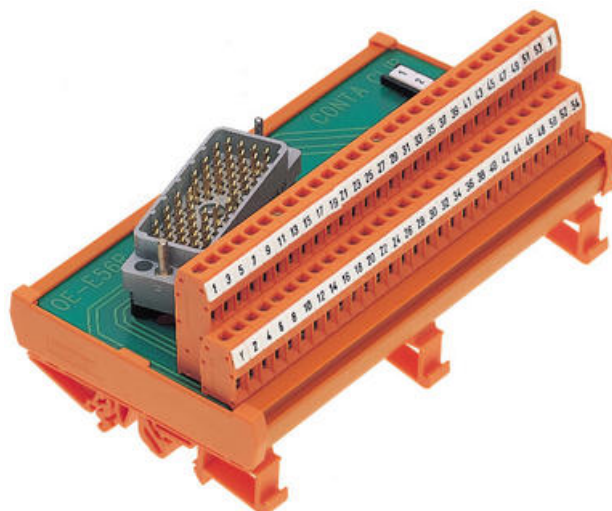

PRODUCT DESCRIPTION

The OE interface modules make use of the EDAC "hermaphrodite" multi-pole plug (Series 516) on screw connections. This results in excellent shock and vibration resistance. The offset arrangement of the connector means that the neighbouring modules will not be impaired and is available in left and right handed versions.

The EDAC connector is 100% compatible with the ELCO 8016 connector series

TECHNICAL DATA

GENERAL DATA

Connector type	ELCO 8016 - EDAC 516
Connection type	Screw
Number of connections	1
Number of poles	36 + PE

DIMENSIONS

Length	122 mm
Width	107 mm
Height TS 35/7.5	72 mm

CONNECTION DATA

Cross section single wire from	0,2 mm ²
Cross section stranded with ferrule to	2,5 mm ²
Cross section single wire to	2,5 mm ²

Cross section stranded with ferrule from	0,2 mm ²
Stripping length	7 mm
Torque	0,6 Nm
Pin header and position	516-038 right

RATINGS

Operating voltage ac/dc max	250 V
Rated current	36 A
Current carrying capacity per channel max	2 A
DIN-VDE Spec	DIN VDE 0110 EN 50178
Overvoltage category	III
Contamination degree	2
Test voltage eff	0,8 kV
Operating temperature from	-20 °C
Operating temperature to	50 °C

ADDITIONAL DATA

Tariff code	85369010
Country of origin	NL
Weight	264 g
Pack size	1