




## NAFSA - ERDI SERIES

ERDI15

- Dual rest positions held with permanent magnet
- Class E winding (120°C)
- High starting force
- Up to 24N force
- Customer specific version available

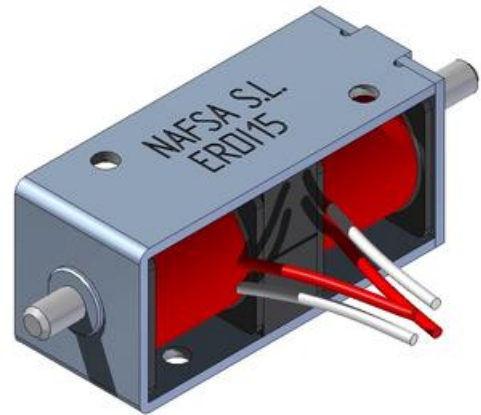

### PRODUCT DESCRIPTION


The ERDI range has two resting positions, moving from one to another by a polarized signal.

The plunger is held at each position by permanent magnets.

### TECHNICAL DATA

<b>Duty cycle</b>	33 %
<b>Function</b>	push/pull
<b>Insulation class</b>	E (120°C)
<b>IP class</b>	IP00
<b>Power</b>	9 W
<b>Stroke</b>	5 mm
<b>Total weight</b>	40 g
<b>Voltage dc max</b>	12 V
<b>Voltage dc min</b>	6 V
<b>Voltage type</b>	DC

Force-stroke Curve (F-S)

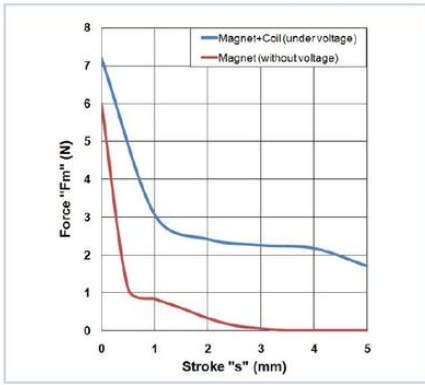

Dimensional drawing:

