


NAFSA - CU20 CPXU SERIES

CU20/CPXU

- Security locking bolt
- Class B winding (130°C)
- Positive detection options
- Up to 0.35N force
- Customer specific version available

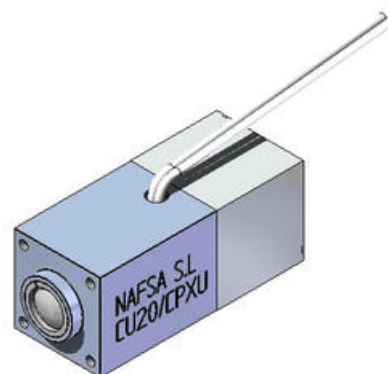

PRODUCT DESCRIPTION

This locking bolt is a linear solenoid, reinforced to cope with extra external forces.

It has a front mounting and locks under voltage.

TECHNICAL DATA

Beginning of stroke force at 100% duty	0,35 N
Duty cycle	100 %
Insulation class	B(130°C)
IP class	IP40
Plunger weight	17 g
Return spring force	0,7 N
Stroke	10 mm
Temperature rise	70 °C
Total weight	90 g
Voltage dc max	48 V
Voltage dc min	6 V

Solenoid shown under voltage

