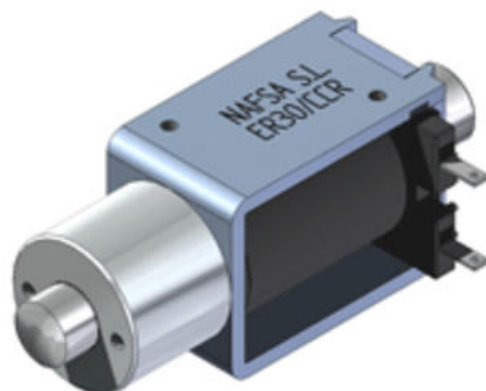


NAFSA - ER30 CCR SERIES

ER30/CCR

- Reinforced locking bolt
- Class B winding (130°C)
- Positive detection options
- Up to 1.6daN return force
- Customer specific version available

**PRODUCT DESCRIPTION**

This version of the ER series is a linear solenoid, reinforced to cope with extra external forces.

It has a front mounting and locks under voltage.

TECHNICAL DATA

Absorbed power @ 20°C, 100% duty	8 W
Duty cycle	100 %
Insulation class	B (130°C)
IP class	IP00
Return spring force	0,16 N
Spring return	Yes
Stroke	10 mm
Temperature rise	70 °C
Total weight	220 g
Voltage ac max	230 V
Voltage ac min	24 V
Voltage dc max	205 V
Voltage dc min	3 V

Solenoid shown without voltage

