




## NAFSA - ER30 CCR SERIES

ER30/CCR

- Reinforced locking bolt
- Class B winding (130°C)
- Positive detection options
- Up to 1.6daN return force
- Customer specific version available

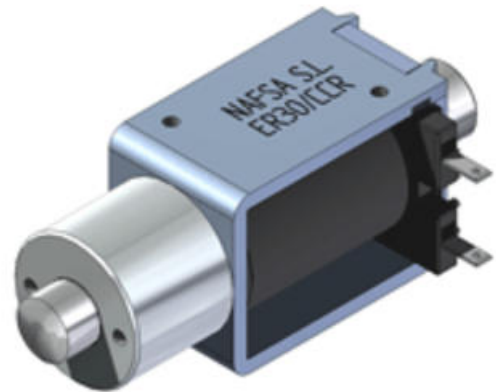

### PRODUCT DESCRIPTION

This version of the ER series is a linear solenoid, reinforced to cope with extra external forces.

It has a front mounting and locks under voltage.

### TECHNICAL DATA

<b>Absorbed power @ 20°C, 100% duty</b>	8 W
<b>Duty cycle</b>	100 %
<b>Insulation class</b>	B (130°C)
<b>IP class</b>	IP00
<b>Return spring force</b>	0,16 N
<b>Spring return</b>	Yes
<b>Stroke</b>	10 mm
<b>Temperature rise</b>	70 °C
<b>Total weight</b>	220 g
<b>Voltage ac max</b>	230 V
<b>Voltage ac min</b>	24 V
<b>Voltage dc max</b>	205 V
<b>Voltage dc min</b>	3 V

Solenoid shown without voltage

