




## NAFSA - ERMI SERIES

ERMI200/60

- Rectangular holding magnet
- Class Y winding (90°C)
- 15% duty cycle
- Up to 3000N force
- Customer specific version available

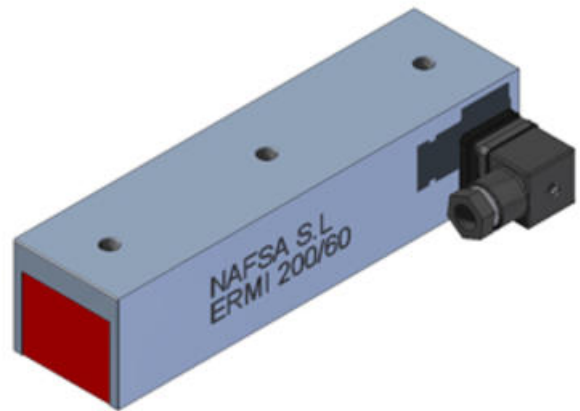

### PRODUCT DESCRIPTION

The ERMI series holds when a voltage is not present.

When the voltage is applied, the holding force is released.

Please ensure safe operating conditions are met when using this type of holding electromagnet

### TECHNICAL DATA

<b>Insulation class</b>	Y (90°C)
<b>IP class</b>	IP65
<b>Minimum impulse time for voltage to release</b>	300 ms
<b>Power</b>	250 W
<b>Voltage dc max</b>	24 V

Thickness of the piece to hold(mm)	Air gap (mm) (1)						
	0	0,1	0,2	0,3	0,4	0,6	1
1	250	210	190	180	165	160	140
3	1350	1250	1150	1100	1000	925	870
6	2350	2000	1750	1400	1200	1100	990
10	2800	2450	2150	1900	1600	1450	1300
15	3000	2550	2300	2000	1700	1500	1300

