


NAFSA - CU20 CPXU SERIES

CU20/CPXU

- Security locking bolt
- Class B winding (130°C)
- Positive detection options
- Up to 0.35N force
- Customer specific version available

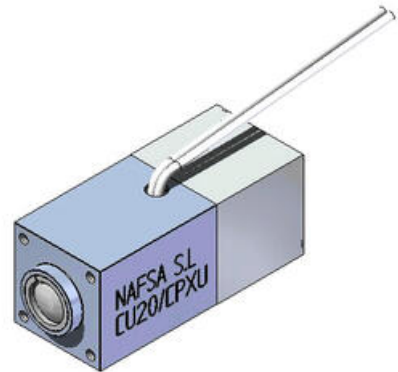

PRODUCT DESCRIPTION

This locking bolt is a linear solenoid, reinforced to cope with extra external forces.

It has a front mounting and locks under voltage.

TECHNICAL DATA

| | |
|---|----------|
| Beginning of stroke force at 100% duty | 0,35 N |
| Duty cycle | 100 % |
| Insulation class | B(130°C) |
| IP class | IP40 |
| Plunger weight | 17 g |
| Return spring force | 0,7 N |
| Stroke | 10 mm |
| Temperature rise | 70 °C |
| Total weight | 90 g |
| Voltage dc max | 48 V |
| Voltage dc min | 6 V |

