

0116 284 9900 | Orders@oem.co.uk | www.oem.co.uk


CONTACLIP

LAMP TEST MODULES - LPM

LPM-K, LPM-A

5710.2 LPM 7-A, 7 channels, common cathode with common point - LV

- TS35/32 mount
- Common Cathode or Individual Cathode
- High Voltage versions

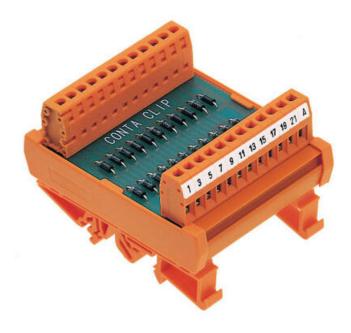

PRODUCT DESCRIPTION

Conta-Clip have a range of Lamp Test Modules designed with blocking diodes to prevent back feeds when using multiple control circuits. These compact modules can be mounted quickly on the DIN Rail and available for low voltage or high voltage applications

The LPM-K modules feature diodes which are connected in pairs on the cathode side. They are freely switchable at the anode. i.e., Individually switched by separate input, normally used for grouping lamps

The LPM-A modules feature diodes which are connected in pairs on the Cathode side. One anode from the connected pair is connected to a common collection point with the other Anodes. i.e., A single switch can active all the lamps connected to the module - more common configuration

LPM LPM-A

*The .../AD modules must be used when the operating voltage exceeds 30 V AC/60 V DC. The AD modules are the same spec, just have protective covers. Designs with other diode types are available upon request.

TECHNICAL DATA

GENERAL DATA

Cover	No
Number of channels	7

RATINGS

DIN-VDE Spec	DIN VDE 0110 / EN 50178
Current carrying capacity per channel max	1 A
Operating temperature from	-20 °C
Operating voltage ac/dc max	250 V
Operating temperature to	50 °C

Contamination degree	2	
Overvoltage category	III	
DIMENSIONS		

Height TS 35/7.5	57 mm
Length	87 mm
Width	49 mm

CONNECTION DATA

Cross section stranded wire to	2,5 mm²
Cross section single wire from	0,2 mm ²
Cross section stranded wire from	0,2 mm²
Cross section stranded with ferrule from	0,2 mm ²
Connection type	Screw
Cross section stranded with ferrule to	2,5 mm ²
Stripping length	7 mm
Cross section single wire to	2,5 mm²
Torque	0,6 Nm

ADDITIONAL DATA

Pack size	1
Country of origin	NL
Tariff code	85411000
Weight	78 g
Common anode	Yes

