



## VECTOR T1 HANDLE

272063-68-S1

Vector T1 handle, zinc/steel, black, key 805, 180°, adj  
1-point cam

- IP65/NEMA4
- Molded bolts
- Zinc/stainless steel
- 4mm compression



### PRODUCT DESCRIPTION

Recessed T-handle with 4mm compression function with cast-in bolt for mounting with nut. (Max tightening torque 2.2 Nm). The handle can be locked with a cylinder lock and/or padlock. The handle can then neither be lifted nor turned. The cylinder lock is protected by a rotatable cover. Rotation right, left or 180°. Five different rule options. Supplied with cylinder and dust cover. Protection class IP65/NEMA 4. On request, the handle can be supplied with separate, unassembled cylinder locks. Handling is simplified and makes it possible to more easily adapt different lock combinations for changing needs.

Example:

Zinc handle, black, equal locking with 90° counterclockwise rotation and fixed rule, 275063-68V-5861.

Material:

Body and reel: Glass fiber reinforced polyamide (PA6), black.

Handle: Zinc, chromed, powder coated, black structure or stainless steel (304).

Fixed rule threaded bolts: Steel, FZB

Adjustable rule: Zinc, passivated.


Shaft: Steel, fzb or stainless steel (304).


Padlock loop: Stainless steel (304).

Cylinder: Zinc, stainless steel (304) protective sheet.

\* The fixed roller rule/three-point rule can be obtained with other dimensions on request.

CREATE P/N FOR VECTOR T HANDLE (AAAAA-BB00000)							
AAAAA	Handle/Shaft	BB000	Cylinder	C	Opening rotation	000000	Cam
00000	Standard	000	000	0	00000	00000	00000
00000	Standard	000	000	0	00000	00000	00000
00000	Standard	000	000	0	00000	00000	00000
00000	Standard	000	000	0	00000	00000	00000
00000	Standard	000	000	0	00000	00000	00000
00000	Standard	000	000	0	00000	00000	00000
00000	Standard	000	000	0	00000	00000	00000
00000	Standard	000	000	0	00000	00000	00000

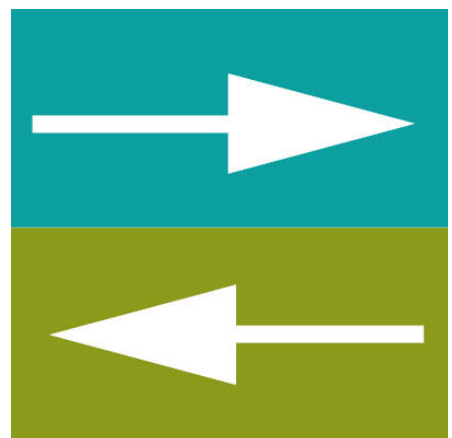

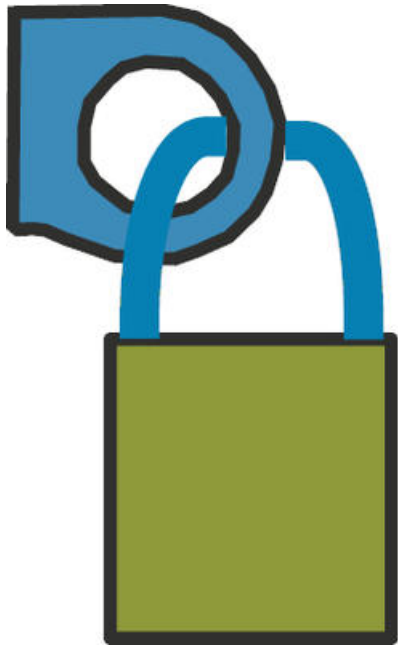

**Integrated  
PUR-gasket**

