


INTERFACE RELAY BASES ONLY

16190.2

IRC 6...12...24V AC/DC, Relay base

- Mount/dismount lever
- Pluggable external cross-connectors

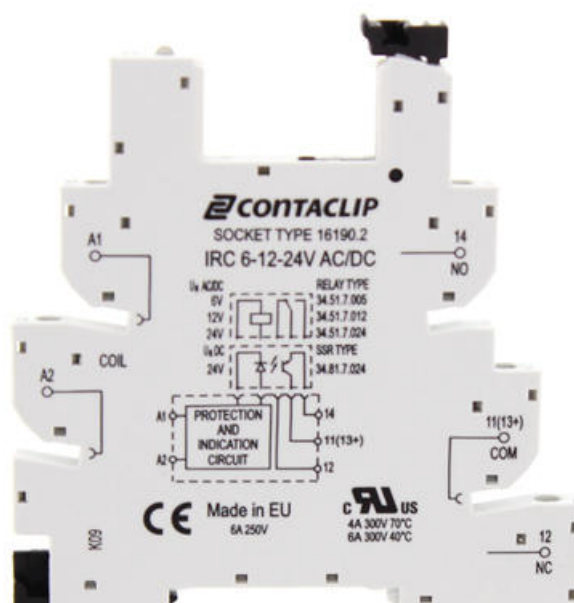

PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Rated voltage U_n	6-12-24 V ac/dc
Overvoltage category	III
Contamination degree	3
LED status	Yes

OUTPUT DATA

Contact configuration	1 CO
Rated V ac / switching V ac max	250 / 400 V ac

CONNECTION DATA

Cross section single wire from	0,2 mm ²
Cross section single wire to	2,5 mm ²
Stripping length	10 mm
Torque	0,5 Nm
Connection type	Screw

GENERAL DATA

Approvals	CE
IP class	IP20
Operating temperature from	-40 °C
Operating temperature to	70 °C

DIMENSIONS & MATERIALS

Width	6,2 mm
Length	87 mm
Height TS 35 / 7.5 with base	90,7 mm
Flammability class	UL94-V2

ADDITIONAL DATA

Tariff code	85369010
Country of origin	EEC
Weight	32,7 g
Pack size	10