


SOCKET FOR C10 INTERFACE RELAYS

1-pole

S-10
Socket For C10 Interface Relay 5 Pin Screw

- I/O connection, contact connection on one side
- Small construction dimensions, only 15.6 mm wide
- Strappable A2 for block mounting
- Robust screws and terminal openings

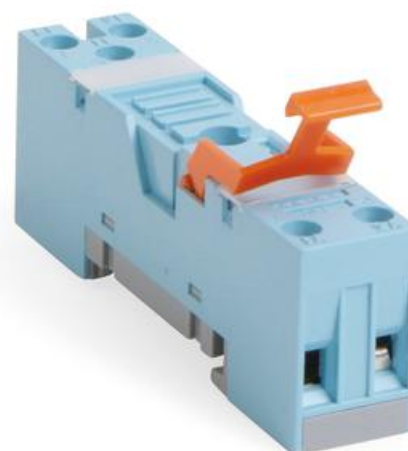

PRODUCT DESCRIPTION

TECHNICAL DATA

OUTPUT DATA

Breaking Voltage	250 V
Breaking capacity current	10 A

GENERAL DATA

Isolation connection/connection	2500 V
Isolation connection/rail	5000 V
Material	Lexan
Torque connection	0,7 Nm
Mounting	DIN-rail
Screw size	M3, Pozi
Connection area single wire	4 mm ² / 2x2,25 mm ²
Connection area multiple conductors	0,35-2,5 mm ²
Temperature operational min	-40 °C
Storage temperature min	-40 °C
Storage temperature max	80 °C
Temperature operational max	60 °C
Weight	23 g

