


SOCKETS FOR C7 MINIATURE RELAYS

2-pole

S7C

Socket For C7 Relay 8 Pin Screw

- Rail or screw mount
- Semi-protected
- Small construction dimensions, only 22.5 mm wide
- Supplied with open connections

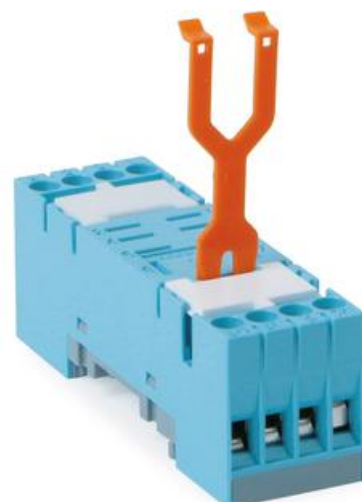

PRODUCT DESCRIPTION

TECHNICAL DATA

OUTPUT DATA

Breaking Voltage	250 V
Breaking capacity current	10 A

GENERAL DATA

Isolation connection/connection	2500 V
Isolation connection/rail	2500 V
Material	Lexan
Torque connection	0,7 Nm
Mounting	DIN-rail
Screw size	M3, Pozi
Connection area single wire	4 mm ² / 2x1,5 mm ²
Connection area multiple conductors	0,75-1,5 mm ²
Temperature operational min	-40 °C
Storage temperature min	-40 °C
Storage temperature max	80 °C
Temperature operational max	60 °C
Weight	37 g

