

C12 INTERFACE RELAY

2-pole 5 A - IRC

C12A2124A
Relay 8 Pin 2 Pole 24V ac

- Robust flat pins
- Both mechanical and LED indication
- Colour-coded test button
- Integrated safety components



PRODUCT DESCRIPTION

TECHNICAL DATA

INPUT DATA

Overvoltage UNX max	1,1
Voltage min	0,6 V
Nominal power ac	1,1 VA
Coil voltage ac	24 V AC
Response time	10 ms
Working Un	0,8-1,10


OUTPUT DATA

Surge current (20 ms)	15 A
Recommended min load	10 mA/10 V
Bounce time	1
Release time	5 ms
Recommended max load	5 A/250 V AC 1; 0,5A/110 V DC-1
Breaking capacity current	5 A
Release time + contact debounce	8 ms
Breaking Voltage	250 V
Mechanical life expectancy	AC: 10Mill/. DC: 20 Mill
Number of contacts	2

Contact material	AgNi + 0,2 μ Au
------------------	-----------------




GENERAL DATA

Frequency	50 Hz
IP class	IP40
Isolation contact/coil	5000 V
Weight	21 g
Isolation contact/contact	3000 V

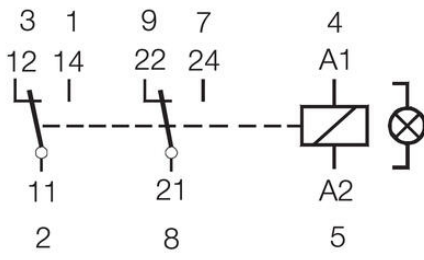

C12-A21

5A 250V AC-1
5A 30V DC-1

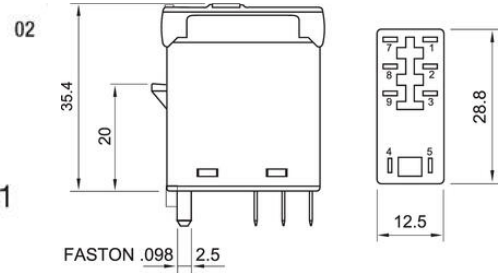

CE EAC
Made in India

