


## INTERFACE RELAY BASES ONLY

16190.2

IRC 6...12...24V AC/DC, Relay base

- Mount/dismount lever
- Pluggable external cross-connectors

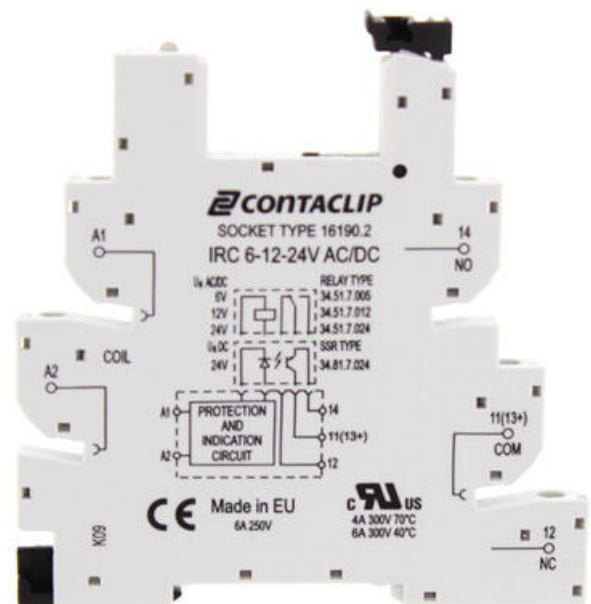

### PRODUCT DESCRIPTION

### TECHNICAL DATA

#### INPUT DATA

LED status	Yes
Contamination degree	3
Rated voltage Un	6-12-24 V ac/dc
Overvoltage category	III

#### OUTPUT DATA

Contact configuration	1 CO
Rated V ac / switching V ac max	250 / 400 V ac

#### CONNECTION DATA

Cross section single wire from	0,2 mm <sup>2</sup>
Connection type	Screw
Stripping length	10 mm
Cross section single wire to	2,5 mm <sup>2</sup>
Torque	0,5 Nm

#### GENERAL DATA

<b>IP class</b>	IP20
<b>Operating temperature from</b>	-40 °C
<b>Operating temperature to</b>	70 °C
<b>Approvals</b>	CE

## **DIMENSIONS & MATERIALS**

<b>Flammability class</b>	UL94-V2
<b>Height TS 35 / 7.5 with base</b>	90,7 mm
<b>Length</b>	87 mm
<b>Width</b>	6,2 mm

## **ADDITIONAL DATA**

<b>Pack size</b>	10
<b>Country of origin</b>	EEC
<b>Tariff code</b>	85369010
<b>Weight</b>	32,7 g