

KUEBLER - ABSOLUTE-CODED ANGULAR TRANSMITTER SENDIX 5868/5888, OPTICAL, PROFIBUS, Ø58 MM

SERIE 5868 PROFIBUS

- Housing diameter Ø58 mm
- Profibus
- High shock resistance
- High enclosure class



PRODUCT DESCRIPTION

Sendix 5868/5888 is a multivariate fieldbus sensor with Profibus in robust design. Thanks to the construction of Safety-Lock™ as well as the fully cast housing, the sensor is able to handle even the more demanding applications where there are high demands on the sensor. The wide temperature range combined with the high enclosure class allows the sensor to be used outdoors as well as applications where large temperature changes occur. Sendix 5868/5888 has LED indication which facilitates diagnosis of the sensor and a set button that facilitates calibration.

Please refer to the images below for ordering information.

Order code	8.5868 . XX3X . 311X						
Shaft version	Type	a	b	c	d	e	f
a Flange							
1 = clamping flange, IP65 ø 58 mm [2.28"]							
3 = clamping flange, IP67 ø 58 mm [2.28"]							
2 = synchro flange, IP65 ø 58 mm [2.28"]							
4 = synchro flange, IP67 ø 58 mm [2.28"]							
5 = square flange, IP65 □ 63.5 mm [2.5"]							
7 = square flange, IP67 □ 63.5 mm [2.5"]							
b Shaft (ø x L), with flat							
1 = 6 x 10 mm [0.24 x 0.39"] ¹⁾							
2 = 10 x 20 mm [0.39 x 0.79"] ²⁾							
3 = 1/4" x 7/8"							
4 = 3/8" x 7/8"							
c Interface / power supply							
3 = PROFIBUS DP V0 encoder profile V 1.1, 10 ... 30 V DC							
d Type of connection, removable bus terminal cover							
1 = with radial cable gland fitting							
2 = with 3 x radial M12 connectors							
e Fieldbus profile							
31 = PROFIBUS DP V0 encoder profile class 2							
f Options (service)							
2 = no option							
3 = SET button							
Optional on request							
- Ex 2/22							
- surface protection salt spray tested							
- seawater resistant (stainless steel V4A)							
Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)							
	salt spray tested: 8.5868.3232.3112-C				stainless steel V4A: 8.5868.3232.3112-V4A		
				1.4404			

Order code
Hollow shaft

8.5888
Type

. X X 3 X . 3 1 X
a b c d e f

a Flange

- 1 = with spring element, long, IP65
- 2 = with spring element, long, IP67
- 3 = with stator coupling, IP65 ø 65 mm [2.56"]
- 4 = with stator coupling, IP67 ø 65 mm [2.56"]
- 5 = with stator coupling, IP65 ø 63 mm [2.48"]
- 6 = with stator coupling, IP67 ø 63 mm [2.48"]

b Blind hollow shaft

(insertion depth max. 30 mm [1.18"])

- 3 = ø 10 mm [0.39"]
- 4 = ø 12 mm [0.47"]
- 5 = ø 14 mm [0.55"]
- 6 = ø 15 mm [0.59"]
- 8 = ø 3/8"
- 9 = ø 1/2"

c Interface / power supply

3 = PROFIBUS DP V0 encoder profile V 1.1, 10 ... 30 V DC

d Type of connection, removable bus terminal cover

- 1 = with radial cable gland fitting
- 2 = with 3 x radial M12 connectors

e Fieldbus profile

31 = PROFIBUS DP V0 encoder profile class 2

f Options (service)

- 2 = no option
- 3 = SET button

Optional on request

- Ex 2/22
- surface protection salt spray tested
- seawater resistant (stainless steel V4A)

Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)




salt spray tested:
8.5888.2432.3112-C
8.5888.2532.3112-C



stainless steel V4A:
8.5888.2432.3112-V4A

TECHNICAL DATA

Connection	Cable, M12
Housing diameter	58 mm
IP class	IP65, IP67
Mounting	Shoulder
Output	Profibus
Resolution MT	12 bit
Resolution overall	Max. 28 bit (default 25 bit)
Resolution ST	16 bit (default: 13 bit)
Sensor type	Absolute
Shaft diameter max	10 mm
Shaft diameter min	6 mm
Supply voltage dc max	30 V DC
Supply voltage dc min	10 V DC
Temperature operational max	80 °C
Temperature operational min	-40 °C
Version	Multiturn

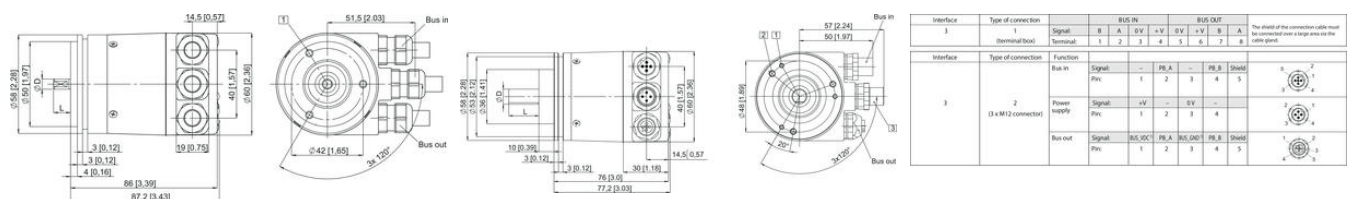

Interface	Type of connection	Signal	B	A	0V	+V	0V	+V	B	A	Shield		
1	1 (terminal box)	Terminal	1	2	3	4	5	6	7	8			
3	2 (3 x M12 connector)	Bus in	Signal	-	PS A	-	PS B	Shield				1 2 3 4 5	
		Power supply	Signal	-V	-	0V	-						1 2 3 4 5
		Bus out	Signal	PS, 0C	PS A	PS, 0C	PS B	Shield					1 2 3 4 5
		Pin		1	2	3	4	5					1 2 3 4 5